

圖號. DRAWING. NO : FP3SS-1

品名 NAME : SOLDER SLEEVE CONNECTORS

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	修改L公差	111. 09. 20	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	26	24	22	20	18	16	14	12	10
MAX AMP	5. 5	7	9	12	17	18	30	35	50

NOTE:

1. SHRINK TEMP:150°C
OPERATING TEMP:-10°C ~ 105°C


WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	L REF	d min
26-24 AWG 0. 25-0. 34 mm ²	SS0. 5	26. 0	1. 7
22-18 AWG 0. 5-1. 0 mm ²	SS1	42. 0	2. 7
16-14 AWG 1. 5-2. 5 mm ²	SS2	42. 0	4. 5
12-10 AWG 4-6 mm ²	SS5	42. 0	6. 0

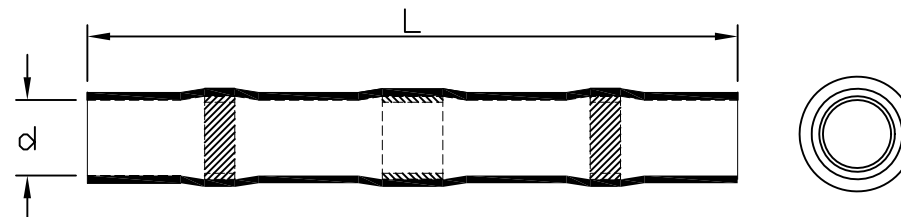

認可 APPROVALS

製圖 DRAFT:	TINA
設計 DESIGN:	KEN
核可 CHECKED:	KEN

第三視角
THIRD VIEW



MATERIAL

INSULATION : HEAT-SHRINK TUBE
MATERIAL :
TIN PLATING

單位UNIT

m/m
比例SCALE



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE:2015. 01. 05