
Standard printed markers

DEK card – Dekafix standard printing	E.2
CableLine® – Introduction	E.4
CableLine® – CLI C – closed wire markers	E.6
CableLine® – CLI O – open wire markers	E.38
CableLine® – CLI M – cable markers and holders	E.44
CableLine® – accessories	E.51
WSM – stainless steel markers	E.54
Labels – standard print	E.58
KSW – PCB plug-in connector labels	E.60

DEK card – Dekafix standard printing

The Dekafix marker is the universal marker for terminals and plug-in connectors, as well as electronic modules from the Weidmüller product range. Dekafix provides you with a wide range of standard printing options. The system is particularly suitable for short sequences of numbers and is also available for customer-specific printing.

- In strips for fast installation
- Large selection of ready-to-use printed markers
- Excellent printing quality with the MC Laser
- Available in 4 widths

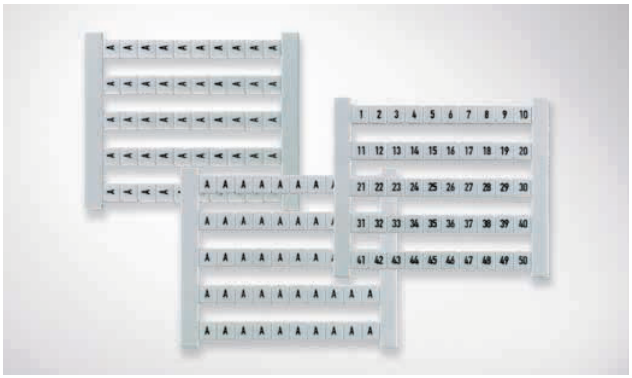

In the form of a card, the Dekafix (DEK) marker is the universal marker for the Weidmüller SAK, W, P and Z series. The markers lie flush in the marker channel which guarantees optimum and secure positioning.



- The DEK marker is suitable for all wire and plug-in connectors, plus electronic assemblies from Weidmüller
- The system is particularly suitable for short number strings and is also available with custom printing
- Wide selection of ready-to-use, printed markers
- In strips for fast installation

Halogen Free

Technical data

Material	Polyamide 66, halogen-free
UL 94 flammability rating	V2
Temperature range	–40 °C to 100 °C
Printing	Black

Ordering data

Qty	500 pcs 10 cards	
Pitch	DEK 5 = 5 mm : DEK 6 = 6 mm : DEK 6.5 = 6.5 mm : DEK 8 = 8 mm	
Printing variations	FW = consecutive horizontal	e.g. DEK 5 FW 1-50
	FS = consecutive vertical	e.g. DEK 5 FS 51-100
	FWZ = consecutive horizontal line	e.g. DEK 5 FWZ 1-10
	FSZ = consecutive vertical line	e.g. DEK 5 FSZ 21-30
	GW = identical horizontal	e.g. DEK 5 GW A
	GS = identical vertical	e.g. DEK 5 GS B
Specify colour and characters for special printing		

DEK variant

Type	Order No.
DEK 5 FS 1-50	0473560001
DEK 5 FS 101-150	0473560101
DEK 5 FS 151-200	0473560151
DEK 5 FS 201-250	0473560201
DEK 5 FS 51-100	0473560051
DEK 5 FSZ 1-10	0460660001
DEK 5 FSZ 11-20	0460660011
DEK 5 FSZ 21-30	0460660021
DEK 5 FSZ 31-40	0460660031
DEK 5 FSZ 41-50	0460660041
DEK 5 FSZ 51-60	0460660051
DEK 5 FSZ 61-70	0460660061
DEK 5 FSZ 71-80	0460660071
DEK 5 FSZ 81-90	0460660081
DEK 5 FSZ 91-100	0460660091
DEK 5 FW 1,3,5,...99	1358460000
DEK 5 FW 1-50	0473460001
DEK 5 FW 101-150	0473460101
DEK 5 FW 151-200	0473460151
DEK 5 FW 2,4,...100	1358560000
DEK 5 FW 201-250	0473460201
DEK 5 FW 251-300	0473460251
DEK 5 FW 301-350	0473460301
DEK 5 FW 351-400	0473460351
DEK 5 FW 401-450	0473460401
DEK 5 FW 451-500	0473460451
DEK 5 FW 501-550	0473460501
DEK 5 FW 51-100	0473460051
DEK 5 FW 551-600	0473460551
DEK 5 FW 601-650	0473460601
DEK 5 FW 651-700	0473460651
DEK 5 FW 701-750	0473460701
DEK 5 FW 751-800	0473460751
DEK 5 FW 801-850	0473460801
DEK 5 FW 851-900	0473460851
DEK 5 FW 901-950	0473460901
DEK 5 FWZ 1,3,5-19	0235860000
DEK 5 FWZ 1-10	0523060001
DEK 5 FWZ 11-20	0523060011
DEK 5 FWZ 2,4,6-20	0236160000
DEK 5 FWZ 21,23,25-39	0235960000
DEK 5 FWZ 21-30	0523060021
DEK 5 FWZ 22,24,26-40	0236260000
DEK 5 FWZ 31-40	0523060031
DEK 5 FWZ 41,43,45-59	0236060000
DEK 5 FWZ 41-50	0523060041
DEK 5 FWZ 42,44,46-60	0236360000
DEK 5 FWZ 51-60	0523060051
DEK 5 FWZ 61-70	0523060061
DEK 5 FWZ 71-80	0523060071
DEK 5 FWZ 81-90	0523060081
DEK 5 FWZ 91-100	0523060091
DEK 5 FWZ L1-EIK	0354361203
DEK 5 FWZ L1-PE	0354361187
DEK 5 FWZ U,V,W,N,PE	0558360000
DEK 5 GW +	0576261198
DEK 5 GW -	0576261199
DEK 5 GW 1	0522660001
DEK 5 GW 10	0522660010
DEK 5 GW 11	0522660011
DEK 5 GW 12	0522660012
DEK 5 GW 13	0522660013
DEK 5 GW 14	0522660014
DEK 5 GW 15	0522660015
DEK 5 GW 16	0522660016
DEK 5 GW 17	0522660017
DEK 5 GW 18	0522660018
DEK 5 GW 19	0522660019
DEK 5 GW 2	0522660002
DEK 5 GW 20	0522660020
DEK 5 GW 21	0522660021
DEK 5 GW 3	0522660003

Type	Order No.
DEK 5 GW 4	0522660004
DEK 5 GW 5	0522660005
DEK 5 GW 6	0522660006
DEK 5 GW 7	0522660007
DEK 5 GW 8	0522660008
DEK 5 GW 9	0522660009
DEK 5 GW A	0522761021
DEK 5 GW B	0522761022
DEK 5 GW ERDE	0576261202
DEK 5 GW ERDE I.KR.	0576261203
DEK 5 GW F	0522761026
DEK 5 GW L	0522761032
DEK 5 GW L1	0522361075
DEK 5 GW L2	0522361076
DEK 5 GW L3	0522361077
DEK 5 GW N	0522761034
DEK 5 GW O	0522761035
DEK 5 GW PE	0537261187
DEK 5 GW R	0522761038
DEK 5 GW S	0522761039
DEK 5 GW T	0522761040
DEK 5 GW U	0522761041
DEK 5 GW V	0522761042
DEK 5 GW W	0522761043
DEK 5 GW X	0522761044
DEK 5/3,5 MC FSZ 1-10	1762320001
DEK 5/3,5 MC FSZ 101-110	1762320101
DEK 5/3,5 MC FSZ 11-20	1762320011
DEK 5/3,5 MC FSZ 111-120	1762320111
DEK 5/3,5 MC FSZ 121-130	1762320121
DEK 5/3,5 MC FSZ 21-30	1762320021
DEK 5/3,5 MC FSZ 31-40	1762320031
DEK 5/3,5 MC FSZ 41-50	1762320041
DEK 5/3,5 MC FSZ 51-60	1762320051
DEK 5/3,5 MC FSZ 61-70	1762320061
DEK 5/3,5 MC FSZ 71-80	1762320071
DEK 5/3,5 MC FSZ 81-90	1762320081
DEK 5/3,5 MC FSZ 91-100	1762320091
DEK 6 FS 1-50	0468760001
DEK 6 FS 101-150	0468760101
DEK 6 FS 51-100	0468760051
DEK 6 FSZ 1-10	0133360001
DEK 6 FSZ 11-20	0133360011
DEK 6 FSZ 21-30	0133360021
DEK 6 FSZ 31-40	0133360031
DEK 6 FSZ 41-50	0133360041
DEK 6 FW 1,3,5...99	1358660000
DEK 6 FW 1-50	0468660001
DEK 6 FW 101-150	0468660101
DEK 6 FW 151-200	0468660151
DEK 6 FW 2,4,...100	1358760000
DEK 6 FW 201-250	0468660201
DEK 6 FW 251-300	0468660251
DEK 6 FW 301-350	0468660301
DEK 6 FW 351-400	0468660351
DEK 6 FW 451-500	0468660451
DEK 6 FW 501-550	0468660501
DEK 6 FW 51-100	0468660051
DEK 6 FW 551-600	0468660551
DEK 6 FW 601-650	0468660601
DEK 6 FW 651-700	0468660651
DEK 6 FW 701-750	0468660701
DEK 6 FW 751-800	0468660751
DEK 6 FW 801-850	0468660801
DEK 6 FW 851-900	0468660851
DEK 6 FW 901-950	0468660901
DEK 6 FW 951-999	0468660951
DEK 6 FW L,N,PE	0632560000
DEK 6 FWZ 1-10	0518960001
DEK 6 FWZ 101-110	0518960101

Type	Order No.
DEK 6 FWZ 11-20	0518960011
DEK 6 FWZ 21-30	0518960021
DEK 6 FWZ 31-40	0518960031
DEK 6 FWZ 41-50	0518960041
DEK 6 FWZ 51-60	0518960051
DEK 6 FWZ 61-70	0518960061
DEK 6 FWZ 71-80	0518960071
DEK 6 FWZ 81-90	0518960081
DEK 6 FWZ 91-100	0518960091
DEK 6 FWZ L1-ERDE I.KRE	0631961203
DEK 6 FWZ L1-PE	0631961187
DEK 6 GW +	1318061198
DEK 6 GW -	1318061199
DEK 6 GW 1	0526960001
DEK 6 GW 10	0526960010
DEK 6 GW 2	0526960002
DEK 6 GW 3	0526960003
DEK 6 GW 4	0526960004
DEK 6 GW 5	0526960005
DEK 6 GW 6	0526960006
DEK 6 GW 8	0526960008
DEK 6 GW ERDE	1318061202
DEK 6 GW PE	1318061187
DEK 6,5 FS 1-50	0468260001
DEK 6,5 FS 101-150	0468260101
DEK 6,5 FS 51-100	0468260051
DEK 6,5 FSZ 1-10	0407360001
DEK 6,5 FSZ 11-20	0407360011
DEK 6,5 FW 1-50	0468160001
DEK 6,5 FW 101-150	0468160101
DEK 6,5 FW 51-100	0468160051
DEK 6,5 FW L1-ERDE I.KR	0632161203
DEK 6,5 FWZ 1-10	0519060001
DEK 6,5 FWZ 11-20	0519060011
DEK 6,5 FWZ 21-30	0519060021
DEK 8 FS 1-50 TAMPOPR.	1653350001
DEK 8 FSZ 1-10	1289660001
DEK 8 FSZ 11-20	1289660011
DEK 8 FSZ 21-30	1289660021
DEK 8 FSZ 31-40	1289660031
DEK 8 FSZ 41-50	1289660041
DEK 8 FSZ 51-60	1289660051
DEK 8 FW 1-50 TAMPOPR.	1653340001
DEK 8 FW 51-100 TAMPOP.	1653340051
DEK 8 FWZ 1-10	1276960001
DEK 8 FWZ 11-20	1276960011
DEK 8 FWZ 21-30	1276960021
DEK 8 FWZ 31-40	1276960031
DEK 8 FWZ 41-50	1276960041
DEK 8 FWZ 51-60	1276960051

CableLine®

The programme of products for all wire markings

Individual laser markers as a combined system


Our well matched selection of CableLine products provides you with everything you need for all your professional marking requirements. The combination of systems are defined by the application and contain the following: open and closed cross-section markers from 0.5 to 70 mm², individual markers, transparent sleeves and markers for cable tie assembly. They are available in plastic or stainless steel, with the appropriate accessories and with the labelling options; these products optimally fulfil a wide range of requirements. The laser system used by Weidmüller produces abrasive-resistant print with brilliant quality.

CableLine® – the benefits to you

- No print system necessary
- Simple retrospect changes on site possible

The CableLine® programme comprises

- Wire markers
- Cable markers
- Standard or customer special print
- Accessories and tools
- Available in PVC or stainless steel versions

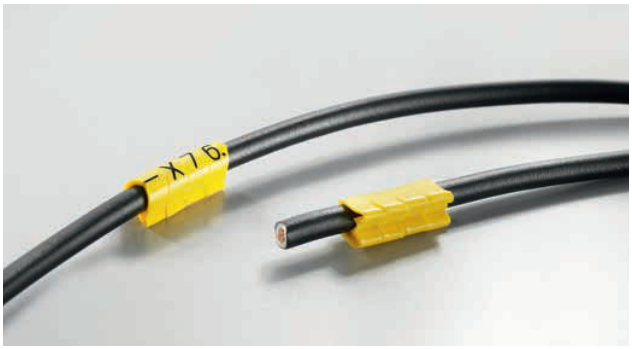

Closed marking from type CLI C with permanent fit. Mounted by sliding onto the wire end.



Open marker from type CLI O also allows mounting onto already connected wires.



Markers from type CLI M are pushed onto holding strips of type CLI MH and finally mounted with cable ties.

CableLine® packaging types






Technical data


	Type	max. characters per marker SDR	Marker length mm	CD	MultiPack	Box	Looped strip
	CLI C 02-3	1	3	500	1000 (5 x 200)	-	-
	CLI C 02-6	2	6	250	1000 (5 x 200)	-	1000
	CLI C 02-9	3	9	125	500 (5 x 100)	-	1000
	CLI C 02-12	4	12	-	-	-	1000
	CLI C 02-15	5	15	-	-	-	1000
	CLI C 02-18	8	18	-	-	-	1000
	CLI C 02-21	10	21	-	-	-	1000
	CLI C 1-3	1	3	500	1000 (5 x 200)	-	-
	CLI C 1-6	2	6	250	500 (5 x 100)	-	1000
	CLI C 1-9	3	9	125	500 (5 x 100)	-	1000
	CLI C 1-12	4	12	-	-	-	1000
	CLI C 1-15	5	15	-	-	-	1000
	CLI C 1-18	8	18	-	-	-	1000
	CLI C 1-21	10	21	-	-	-	1000
	CLI C 1-24	12	24	-	-	-	1000
	CLI C 1-33	17	33	-	-	-	1000
	CLI C 2-4	1	4	250	500 (5 x 100)	-	-
	CLI C 2-6	2	6	125	500 (5 x 100)	-	1000
	CLI C 2-9	3	9	125	500 (5 x 100)	-	1000
	CLI C 2-12	4	12	-	-	-	1000
	CLI C 2-15	6	15	-	-	-	1000
	CLI C 2-18	8	18	-	-	-	1000
	CLI C 2-21	10	21	-	-	-	1000
	CLI C 3-6	2	6	-	100 (5 x 20)	-	1000
	CLI C 3-9	3	9	-	100 (5 x 20)	-	1000
	CLI C 3-12	4	12	-	-	-	1000
	CLI C 3-15	5	15	-	-	-	1000
	CLI C 3-18	8	18	-	-	-	1000
	CLI C 3-21	10	21	-	-	-	1000
	CLI O 10-3	1	3	-	1000 (5 x 200)	-	-
	CLI O 20-3	1	3	-	1000 (5 x 200)	-	-
	CLI O 30-3	1	3	-	1000 (5 x 200)	-	-
	CLI M 2-4	1	4	500	500 (5 x 100)	-	-
	CLI M 2-6	2	6	250	500 (5 x 100)	-	1000
	CLI M 2-9	3	9	125	-	-	1000
	CLI M 2-12	4	12	-	-	-	1000
	CLI M 2-21	10	21	-	-	-	1000
	CLI M 2-25Ω	12	25	-	-	-	1000
	CLI M 2-40Ω	21	40	-	-	-	1000
	CLI MH-70		70	-	-	100	-
	CLI MH-110		110	-	-	100	-

CLI C – Closed wire markers


CLI C wire markers are fitted to unconnected cables. Four different sizes are available to mark wire cross-sections from 0.5 mm² to maximum 70 mm².
The markers are already printed and ready for use. Individual markings can be created by simply combining the individual markers.

Advantages:

- Closed markers, secure and adjustable for unconnected cables
- Special resilient bellow profile ensures a wide application range
- Fast and easy to fit – in next to no time
- Compatible accessories take the strain off marking tasks
- Permanent high-quality markings
- Best contrast for optimum legibility

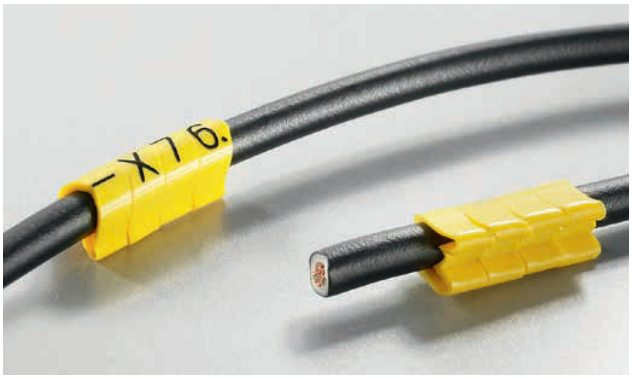

Closed marking from type CLI C with permanent fit.
Mounted by sliding onto the wire end.

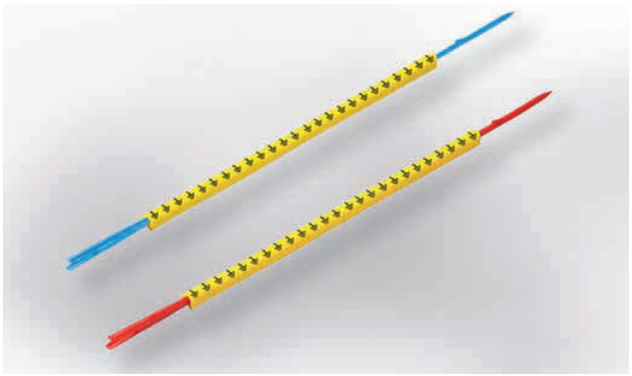

CLI R are pre-assembled mounting mandrels with CLI C markers.

CLI C

Version	Closed markers made from soft PVC. Resilient bellow construction enables fast and easy attachment. Standard, special and international colour-code compliant prints available.
Material	Soft PVC, cadmium- and silicone-free
Temperature range	-30 °C ... 80 °C
Flammability classification	Corresponds to V0 to UL 94
Resistance	Highly resistant to oils and petrol as well as gamma and UV radiation
Printing	Laser marking

Wire cross-section

CLI C02	0.5 mm² – 1.5 mm²
CLI C 1	1.5 mm² – 4 mm²
CLI C 2	2.5 mm² – 16 mm²
CLI C 3	16 mm² – 70 mm²

CLI C 02 Blank (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568241058	CLI C 02-3 GE NE CD	yellow	3.5 / 3.4 mm	Blank	500

CLI C 02 Blank (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0213811687	CLI C 02-3 GE NE MP	yellow	3.5 / 3.5 mm	Blank	200

CLI C 02 Blank (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1873741687	CLI C 02-18 GE NE SG	yellow	3.5 / 3.4 mm	Neutral	1000

CLI C 1 Blank (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0171111687	CLI C 1-3 GE NE MP	yellow	5 / 4.2 mm	Blank	200

CableLine® – CLI C – closed wire markers

CLI C 1 Blank (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568251693	CLI C 1-3 BL NE CD	blue	5 / 4.2 mm	Blank	500
1568251699	CLI C 1-3 GE NE CD	yellow	5 / 4.2 mm	Blank	500
1568251688	CLI C 1-3 GN NE CD	green	5 / 4.2 mm	Blank	500
1568251691	CLI C 1-3 GR NE CD	grey	5 / 4.2 mm	Blank	500
1568251686	CLI C 1-3 RT NE CD	red	5 / 4.2 mm	Blank	500
1568251694	CLI C 1-3 SW NE CD	black	5 / 4.2 mm	Blank	500
1568251044	CLI C 1-3 WS NE CD	white	5 / 4.2 mm	Blank	500
1868811687	CLI C 1-6 GE NE CD	yellow	5 / 4.2 mm	Blank	250

CLI C1 Blank (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	Loop

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871801687	CLI C 1-18 GE NE SG	yellow	5 / 4.2 mm	Neutral	1000

CLI C 2 Blank (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...60 °C	4 - 10 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0171301687	CLI C 2-4 GE NE CD	yellow	8 / 6.9 mm	Blank	250
1871971687	CLI C 2-9 GE NE CD	yellow	8 / 6.9 mm	Blank	125

CLI C 2 Blank (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...60 °C	4 - 10 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871831687	CLI C 2-18 GE NE SG	yellow	8 / 6.9 mm	Neutral	1000

CLI C 02 Custom Printing (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568249999	CLI C 02-3 SDR CD	CSP	3.5 / 3.4 mm	Custom printing	500
1869999999	CLI C 02-6 SDR CD	CSP	3.5 / 3.4 mm	Custom printing	250
1899290000	CLI C 02-9 SDR CD	CSP	3.5 / 3.4 mm	Custom printing	125

CLI C 02 Custom printing (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	1.3 - 3 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1912550000	CLI C 02-3 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1873330000	CLI C 02-12 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
0252509999	CLI C 02-15 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1873749999	CLI C 02-18 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1873340000	CLI C 02-21 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912500000	CLI C 02-24 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912510000	CLI C 02-27 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912580000	CLI C 02-30 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912590000	CLI C 02-33 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912600000	CLI C 02-36 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100
1912610000	CLI C 02-39 SDR SG	CSP	3.5 / 3.4 mm	Custom printing	100

CLI C 1 Custom Printing (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568259999	CLI C 1-3 SDR CD	CSP	5 / 4.2 mm	Custom printing	500
0252709999	CLI C 1-6 SDR CD	CSP	5 / 4.2 mm	Custom printing	250
0252809999	CLI C 1-9 SDR CD	CSP	5 / 4.2 mm	Custom printing	125

CLI C 1 Custom printing (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	2.5 - 5 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1912650000	CLI C 1-3 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1912700000	CLI C 1-6 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1868819999	CLI C 1-9 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1873350000	CLI C 1-12 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1873360000	CLI C 1-15 SDR SG	CSP	5 / 4.2 mm	Custom printing	50
1871809999	CLI C 1-18 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1873370000	CLI C 1-21 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1912640000	CLI C 1-27 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1912660000	CLI C 1-30 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1912670000	CLI C 1-33 SDR SG	CSP	5 / 4.2 mm	Custom printing	100
1912680000	CLI C 1-39 SDR SG	CSP	5 / 4.2 mm	Custom printing	100

CLI C 2 Custom Printing (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	4 - 10 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568269999	CLI C 2-4 SDR CD	CSP	8 / 6.9 mm	Custom printing	250
1871909999	CLI C 2-6 SDR CD	CSP	8 / 6.9 mm	Custom printing	125
1899240000	CLI C 2-9 SDR CD	CSP	8 / 6.9 mm	Custom printing	100

CLI C 2 Custom printing (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	4 - 10 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871979999	CLI C 2-9 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1873380000	CLI C 2-12 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1873390000	CLI C 2-15 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1871839999	CLI C 2-18 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1873400000	CLI C 2-21 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912710000	CLI C 2-24 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912720000	CLI C 2-27 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912730000	CLI C 2-30 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912740000	CLI C 2-33 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912750000	CLI C 2-36 SDR SG	CSP	8 / 6.9 mm	Custom printing	100
1912760000	CLI C 2-39 SDR SG	CSP	8 / 6.9 mm	Custom printing	100

CLI C 3 Custom Printing (on loop)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	80 °C	8 - 16 mm	Loop



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1872309999	CLI C 3-6 SDR SG	CSP	17 / 11 mm	Custom printing	100
1872659999	CLI C 3-9 SDR SG	CSP	17 / 11 mm	Custom printing	100
1873420000	CLI C 3-12 SDR SG	CSP	17 / 11 mm	Custom printing	100
1873430000	CLI C 3-15 SDR SG	CSP	17 / 11 mm	Custom printing	100
1872679999	CLI C 3-18 SDR SG	CSP	17 / 11 mm	Custom printing	100
1873410000	CLI C 3-21 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912770000	CLI C 3-24 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912780000	CLI C 3-27 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912790000	CLI C 3-30 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912800000	CLI C 3-33 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912810000	CLI C 3-36 SDR SG	CSP	17 / 11 mm	Custom printing	100
1912820000	CLI C 3-39 SDR SG	CSP	17 / 11 mm	Custom printing	100

CLI C 02-3 International colour code (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
0252111503	CLI C 02-3 SW/WS 0 MP	●	black	3.5 / 3.4 mm	0	200
0252111506	CLI C 02-3 BR/WS 1 MP	●	brown	3.5 / 3.4 mm	1	200
0252111509	CLI C 02-3 RT/WS 2 MP	●	red	3.5 / 3.4 mm	2	200
0252111512	CLI C 02-3 OR/SW 3 MP	●	orange	3.5 / 3.4 mm	3	200
0252111514	CLI C 02-3 GE/SW 4 MP	●	yellow	3.5 / 3.4 mm	4	200
0252111518	CLI C 02-3 GN/WS 5 MP	●	green	3.5 / 3.4 mm	5	200
0252111521	CLI C 02-3 BL/WS 6 MP	●	blue	3.5 / 3.4 mm	6	200
0252111524	CLI C 02-3 VI/WS 7 MP	●	violet	3.5 / 3.4 mm	7	200
0252111527	CLI C 02-3 GR/SW 8 MP	●	grey	3.5 / 3.4 mm	8	200
0252111530	CLI C 02-3 WS/SW 9 MP	○	white	3.5 / 3.4 mm	9	200

CLI C 02-3 Alphabetic (MulitPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252111637	CLI C 02-3 GE/SW A MP	yellow	3.5 / 3.4 mm	A	200
0252111639	CLI C 02-3 GE/SW B MP	yellow	3.5 / 3.4 mm	B	200
0252111641	CLI C 02-3 GE/SW C MP	yellow	3.5 / 3.4 mm	C	200
0252111643	CLI C 02-3 GE/SW D MP	yellow	3.5 / 3.4 mm	D	200
0252111645	CLI C 02-3 GE/SW E MP	yellow	3.5 / 3.4 mm	E	200
0252111647	CLI C 02-3 GE/SW F MP	yellow	3.5 / 3.4 mm	F	200
0252111649	CLI C 02-3 GE/SW G MP	yellow	3.5 / 3.4 mm	G	200
0252111651	CLI C 02-3 GE/SW H MP	yellow	3.5 / 3.4 mm	H	200
0252111653	CLI C 02-3 GE/SW I MP	yellow	3.5 / 3.4 mm	I	200
0252111655	CLI C 02-3 GE/SW J MP	yellow	3.5 / 3.4 mm	J	200
0252111657	CLI C 02-3 GE/SW K MP	yellow	3.5 / 3.4 mm	K	200
0252111659	CLI C 02-3 GE/SW L MP	yellow	3.5 / 3.4 mm	L	200
0252111661	CLI C 02-3 GE/SW M MP	yellow	3.5 / 3.4 mm	M	200
0252111663	CLI C 02-3 GE/SW N MP	yellow	3.5 / 3.4 mm	N	200
0252111665	CLI C 02-3 GE/SW O MP	yellow	3.5 / 3.4 mm	O	200
0252111667	CLI C 02-3 GE/SW P MP	yellow	3.5 / 3.4 mm	P	200
0252111669	CLI C 02-3 GE/SW Q MP	yellow	3.5 / 3.4 mm	Q	200
0252111671	CLI C 02-3 GE/SW R MP	yellow	3.5 / 3.4 mm	R	200
0252111673	CLI C 02-3 GE/SW S MP	yellow	3.5 / 3.4 mm	S	200
0252111676	CLI C 02-3 GE/SW T MP	yellow	3.5 / 3.4 mm	T	200
0252111679	CLI C 02-3 GE/SW U MP	yellow	3.5 / 3.4 mm	U	200
0252111681	CLI C 02-3 GE/SW V MP	yellow	3.5 / 3.4 mm	V	200
0252111683	CLI C 02-3 GE/SW W MP	yellow	3.5 / 3.4 mm	W	200
0252111687	CLI C 02-3 GE/SW X MP	yellow	3.5 / 3.4 mm	X	200
0252111696	CLI C 02-3 GE/SW Y MP	yellow	3.5 / 3.4 mm	Y	200
0252111698	CLI C 02-3 GE/SW Z MP	yellow	3.5 / 3.4 mm	Z	200

CLI C 02-3 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252111742	CLI C 02-3 GE/SW / MP	yellow	3.5 / 3.4 mm	/	200
0252111738	CLI C 02-3 GE/SW + MP	yellow	3.5 / 3.4 mm	+	200
0252111740	CLI C 02-3 GE/SW - MP	yellow	3.5 / 3.4 mm	-	200
0252111748	CLI C 02-3 GE/SW . MP	yellow	3.5 / 3.4 mm	.	200
0252111750	CLI C 02-3 GE/SW : MP	yellow	3.5 / 3.4 mm	:	200
0252111751	CLI C 02-3 GE/SW = MP	yellow	3.5 / 3.4 mm	=	200
0252111752	CLI C 02-3 GE/SW AC MP	yellow	3.5 / 3.4 mm	AC	200
0252111746	CLI C 02-3 GE/SW ET MP	yellow	3.5 / 3.4 mm	⏚	200
0252111697	CLI C 02-3 GE/SW Ä MP	yellow	3.5 / 3.4 mm	Ä	200
0252111699	CLI C 02-3 GE/SW Å MP	yellow	3.5 / 3.4 mm	Å	200
1568241735	CLI C 02-3 GE/SW Æ CD	yellow	3.5 / 3.4 mm	Æ	500
0252111695	CLI C 02-3 GE/SW Ö MP	yellow	3.5 / 3.4 mm	Ö	200
1568241736	CLI C 02-3 GE/SW Ø CD	yellow	3.5 / 3.4 mm	Ø	500
0252111741	CLI C 02-3 BL/WS - MP	blue	3.5 / 3.4 mm	-	200
0252111737	CLI C 02-3 RT/WS + MP	red	3.5 / 3.4 mm	+	200

CLI C 02-3 International colour code (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568241503	CLI C 02-3 SW/WS 0 CD	black	3.5 / 3.4 mm	0	500
1568241506	CLI C 02-3 BR/WS 1 CD	brown	3.5 / 3.4 mm	1	500
1568241509	CLI C 02-3 RT/WS 2 CD	red	3.5 / 3.4 mm	2	500
1568241512	CLI C 02-3 OR/SW 3 CD	orange	3.5 / 3.4 mm	3	500
1568241514	CLI C 02-3 GE/SW 4 CD	yellow	3.5 / 3.4 mm	4	500
1568241518	CLI C 02-3 GN/WS 5 CD	green	3.5 / 3.4 mm	5	500
1568241521	CLI C 02-3 BL/WS 6 CD	blue	3.5 / 3.4 mm	6	500
1568241524	CLI C 02-3 VI/WS 7 CD	violet	3.5 / 3.4 mm	7	500
1568241527	CLI C 02-3 GR/SW 8 CD	grey	3.5 / 3.4 mm	8	500
1568241530	CLI C 02-3 WS/SW 9 CD	white	3.5 / 3.4 mm	9	500

CLI C 02-3 Numeric sequence (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568241502	CLI C 02-3 GE/SW 0 CD	yellow	3.5 / 3.4 mm	0	500
1869821502	CLI C 02-3 WS/SW 0 CD	white	3.5 / 3.4 mm	0	500
1568241505	CLI C 02-3 GE/SW 1 CD	yellow	3.5 / 3.4 mm	1	500
1869821505	CLI C 02-3 WS/SW 1 CD	white	3.5 / 3.4 mm	1	500
1568241508	CLI C 02-3 GE/SW 2 CD	yellow	3.5 / 3.4 mm	2	500
1869821508	CLI C 02-3 WS/SW 2 CD	white	3.5 / 3.4 mm	2	500
1568241511	CLI C 02-3 GE/SW 3 CD	yellow	3.5 / 3.4 mm	3	500
1869821511	CLI C 02-3 WS/SW 3 CD	white	3.5 / 3.4 mm	3	500
1568241514	CLI C 02-3 GE/SW 4 CD	yellow	3.5 / 3.4 mm	4	500
1869821514	CLI C 02-3 WS/SW 4 CD	white	3.5 / 3.4 mm	4	500
1568241517	CLI C 02-3 GE/SW 5 CD	yellow	3.5 / 3.4 mm	5	500
1869821517	CLI C 02-3 WS/SW 5 CD	white	3.5 / 3.4 mm	5	500
1568241520	CLI C 02-3 GE/SW 6 CD	yellow	3.5 / 3.4 mm	6	500
1869821520	CLI C 02-3 WS/SW 6 CD	white	3.5 / 3.4 mm	6	500
1568241523	CLI C 02-3 GE/SW 7 CD	yellow	3.5 / 3.4 mm	7	500
1869821523	CLI C 02-3 WS/SW 7 CD	white	3.5 / 3.4 mm	7	500
1568241526	CLI C 02-3 GE/SW 8 CD	yellow	3.5 / 3.4 mm	8	500
1869821526	CLI C 02-3 WS/SW 8 CD	white	3.5 / 3.4 mm	8	500
1568241529	CLI C 02-3 GE/SW 9 CD	yellow	3.5 / 3.4 mm	9	500
1568241530	CLI C 02-3 WS/SW 9 CD	white	3.5 / 3.4 mm	9	500

CLI C 02-3 Alphabetic (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568241637	CLI C 02-3 GE/SW A CD		yellow	3.5 / 3.4 mm	A	500
1568241639	CLI C 02-3 GE/SW B CD		yellow	3.5 / 3.4 mm	B	500
1568241641	CLI C 02-3 GE/SW C CD		yellow	3.5 / 3.4 mm	C	500
1568241643	CLI C 02-3 GE/SW D CD		yellow	3.5 / 3.4 mm	D	500
1568241645	CLI C 02-3 GE/SW E CD		yellow	3.5 / 3.4 mm	E	500
1568241647	CLI C 02-3 GE/SW F CD		yellow	3.5 / 3.4 mm	F	500
1568241649	CLI C 02-3 GE/SW G CD		yellow	3.5 / 3.4 mm	G	500
1568241651	CLI C 02-3 GE/SW H CD		yellow	3.5 / 3.4 mm	H	500
1568241653	CLI C 02-3 GE/SW I CD		yellow	3.5 / 3.4 mm	I	500
1568241655	CLI C 02-3 GE/SW J CD		yellow	3.5 / 3.4 mm	J	500
1568241657	CLI C 02-3 GE/SW K CD		yellow	3.5 / 3.4 mm	K	500
1568241659	CLI C 02-3 GE/SW L CD		yellow	3.5 / 3.4 mm	L	500
1568241661	CLI C 02-3 GE/SW M CD		yellow	3.5 / 3.4 mm	M	500
1568241663	CLI C 02-3 GE/SW N CD		yellow	3.5 / 3.4 mm	N	500
1568241665	CLI C 02-3 GE/SW O CD		yellow	3.5 / 3.4 mm	O	500
1568241667	CLI C 02-3 GE/SW P CD		yellow	3.5 / 3.4 mm	P	500
1568241669	CLI C 02-3 GE/SW Q CD		yellow	3.5 / 3.4 mm	Q	500
1568241671	CLI C 02-3 GE/SW R CD		yellow	3.5 / 3.4 mm	R	500
1568241673	CLI C 02-3 GE/SW S CD		yellow	3.5 / 3.4 mm	S	500
1568241676	CLI C 02-3 GE/SW T CD		yellow	3.5 / 3.4 mm	T	500
1568241679	CLI C 02-3 GE/SW U CD		yellow	3.5 / 3.4 mm	U	500
1568241681	CLI C 02-3 GE/SW V CD		yellow	3.5 / 3.4 mm	V	500
1568241683	CLI C 02-3 GE/SW W CD		yellow	3.5 / 3.4 mm	W	500
1568241687	CLI C 02-3 GE/SW X CD		yellow	3.5 / 3.4 mm	X	500
1568241696	CLI C 02-3 GE/SW Y CD		yellow	3.5 / 3.4 mm	Y	500
1568241698	CLI C 02-3 GE/SW Z CD		yellow	3.5 / 3.4 mm	Z	500

CLI C 02-3 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568241738	CLI C 02-3 GE/SW + CD		yellow	3.5 / 3.4 mm	+	500
1568241740	CLI C 02-3 GE/SW - CD		yellow	3.5 / 3.4 mm	-	500
1869821740	CLI C 02-3 WS/SW - CD		white	3.5 / 3.4 mm	-	500
1568241748	CLI C 02-3 GE/SW . CD		yellow	3.5 / 3.4 mm	.	500
1568241742	CLI C 02-3 GE/SW / CD		yellow	3.5 / 3.4 mm	/	500
1568241750	CLI C 02-3 GE/SW : CD		yellow	3.5 / 3.4 mm	:	500
1568241751	CLI C 02-3 GE/SW = CD		yellow	3.5 / 3.4 mm	=	500
1568241752	CLI C 02-3 GE/SW AC CD		yellow	3.5 / 3.4 mm	AC	500
1568241746	CLI C 02-3 GE/SW ET CD		yellow	3.5 / 3.4 mm	⏚	500
1568241747	CLI C 02-3 GE/SW PET. CD		yellow	3.5 / 3.4 mm	⏚	500
1568241056	CLI C 02-3 GE/SW Ä CD		yellow	3.5 / 3.4 mm	Ä	500
1568241055	CLI C 02-3 GE/SW Å CD		yellow	3.5 / 3.4 mm	Å	500
1568241057	CLI C 02-3 GE/SW Ö CD		yellow	3.5 / 3.4 mm	Ö	500
1568241741	CLI C 02-3 BL/WS - CD		blue	3.5 / 3.4 mm	-	500
1568241737	CLI C 02-3 RT/WS + CD		red	3.5 / 3.4 mm	+	500

CLI C 02-6 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568241726	CLI C 02-6 GE/SW A1 CD	yellow	3.5 / 3.4 mm	A1	250
1568241727	CLI C 02-6 GE/SW A2 CD	yellow	3.5 / 3.4 mm	A2	250
1568241728	CLI C 02-6 GE/SW L1 CD	yellow	3.5 / 3.4 mm	L1	250
1568241729	CLI C 02-6 GE/SW L2 CD	yellow	3.5 / 3.4 mm	L2	250
1568241730	CLI C 02-6 GE/SW L3 CD	yellow	3.5 / 3.4 mm	L3	250

CLI C 02-6 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252111726	CLI C 02-6 GE/SW A1 MP	yellow	3.5 / 3.4 mm	A1	100
0252111727	CLI C 02-6 GE/SW A2 MP	yellow	3.5 / 3.4 mm	A2	100
0252111728	CLI C 02-6 GE/SW L1 MP	yellow	3.5 / 3.4 mm	L1	100
0252111729	CLI C 02-6 GE/SW L2 MP	yellow	3.5 / 3.4 mm	L2	100
0252111730	CLI C 02-6 GE/SW L3 MP	yellow	3.5 / 3.4 mm	L3	100

CLI C 02-9 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252111734	CLI C 02-9 GE/SW PEN MP	yellow	3.5 / 3.4 mm	PEN	100

CLI C 02-9 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568241734	CLI C 02-9 GE/SW PEN CD	yellow	3.5 / 3.4 mm	PEN	125

CLI C 1-3 International colour code (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252611503	CLI C 1-3 SW/WS 0 MP	black	5 / 4.2 mm	0	200
0252611506	CLI C 1-3 BR/WS 1 MP	brown	5 / 4.2 mm	1	200
0252611509	CLI C 1-3 RT/WS 2 MP	red	5 / 4.2 mm	2	200
0252611512	CLI C 1-3 OR/SW 3 MP	orange	5 / 4.2 mm	3	200
0252611514	CLI C 1-3 GE/SW 4 MP	yellow	5 / 4.2 mm	4	200
0252611518	CLI C 1-3 GN/WS 5 MP	green	5 / 4.2 mm	5	200
0252611521	CLI C 1-3 BL/WS 6 MP	blue	5 / 4.2 mm	6	200
0252611524	CLI C 1-3 VI/WS 7 MP	violet	5 / 4.2 mm	7	200
0252611527	CLI C 1-3 GR/SW 8 MP	grey	5 / 4.2 mm	8	200
0252611530	CLI C 1-3 WS/SW 9 MP	white	5 / 4.2 mm	9	200

CLI C 1-3 Numeric sequence (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252611502	CLI C 1-3 GE/SW 0 MP	yellow	5 / 4.2 mm	0	200
0252611505	CLI C 1-3 GE/SW 1 MP	yellow	5 / 4.2 mm	1	200
0252611508	CLI C 1-3 GE/SW 2 MP	yellow	5 / 4.2 mm	2	200
0252611511	CLI C 1-3 GE/SW 3 MP	yellow	5 / 4.2 mm	3	200
0252611514	CLI C 1-3 GE/SW 4 MP	yellow	5 / 4.2 mm	4	200
0252611517	CLI C 1-3 GE/SW 5 MP	yellow	5 / 4.2 mm	5	200
0252611520	CLI C 1-3 GE/SW 6 MP	yellow	5 / 4.2 mm	6	200
0252611523	CLI C 1-3 GE/SW 7 MP	yellow	5 / 4.2 mm	7	200
0252611526	CLI C 1-3 GE/SW 8 MP	yellow	5 / 4.2 mm	8	200
0252611529	CLI C 1-3 GE/SW 9 MP	yellow	5 / 4.2 mm	9	200

CLI C 1-3 Alphabetic (MulitPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252611637	CLI C 1-3 GE/SW A MP	yellow	5 / 4.2 mm	A	200
0252611639	CLI C 1-3 GE/SW B MP	yellow	5 / 4.2 mm	B	200
0252611641	CLI C 1-3 GE/SW C MP	yellow	5 / 4.2 mm	C	200
0252611643	CLI C 1-3 GE/SW D MP	yellow	5 / 4.2 mm	D	200
0252611645	CLI C 1-3 GE/SW E MP	yellow	5 / 4.2 mm	E	200
0252611647	CLI C 1-3 GE/SW F MP	yellow	5 / 4.2 mm	F	200
0252611649	CLI C 1-3 GE/SW G MP	yellow	5 / 4.2 mm	G	200
0252611651	CLI C 1-3 GE/SW H MP	yellow	5 / 4.2 mm	H	200
0252611653	CLI C 1-3 GE/SW I MP	yellow	5 / 4.2 mm	I	200
0252611655	CLI C 1-3 GE/SW J MP	yellow	5 / 4.2 mm	J	200
0252611657	CLI C 1-3 GE/SW K MP	yellow	5 / 4.2 mm	K	200
0252611659	CLI C 1-3 GE/SW L MP	yellow	5 / 4.2 mm	L	200
0252611661	CLI C 1-3 GE/SW M MP	yellow	5 / 4.2 mm	M	200
0252611663	CLI C 1-3 GE/SW N MP	yellow	5 / 4.2 mm	N	200
0252611665	CLI C 1-3 GE/SW O MP	yellow	5 / 4.2 mm	O	200
0252611667	CLI C 1-3 GE/SW P MP	yellow	5 / 4.2 mm	P	200
0252611669	CLI C 1-3 GE/SW Q MP	yellow	5 / 4.2 mm	Q	200
0252611671	CLI C 1-3 GE/SW R MP	yellow	5 / 4.2 mm	R	200
0252611673	CLI C 1-3 GE/SW S MP	yellow	5 / 4.2 mm	S	200
0252611676	CLI C 1-3 GE/SW T MP	yellow	5 / 4.2 mm	T	200
0252611679	CLI C 1-3 GE/SW U MP	yellow	5 / 4.2 mm	U	200
0252611681	CLI C 1-3 GE/SW V MP	yellow	5 / 4.2 mm	V	200
0252611683	CLI C 1-3 GE/SW W MP	yellow	5 / 4.2 mm	W	200
0252611687	CLI C 1-3 GE/SW X MP	yellow	5 / 4.2 mm	X	200
0252611696	CLI C 1-3 GE/SW Y MP	yellow	5 / 4.2 mm	Y	200
0252611698	CLI C 1-3 GE/SW Z MP	yellow	5 / 4.2 mm	Z	200

CLI C 1-3 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252611738	CLI C 1-3 GE/SW + MP	yellow	5 / 4.2 mm	+	200
0252611740	CLI C 1-3 GE/SW - MP	yellow	5 / 4.2 mm	-	200
0252611748	CLI C 1-3 GE/SW . MP	yellow	5 / 4.2 mm	.	200
0252611742	CLI C 1-3 GE/SW / MP	yellow	5 / 4.2 mm	/	200
0252611750	CLI C 1-3 GE/SW : MP	yellow	5 / 4.2 mm	:	200
0252611751	CLI C 1-3 GE/SW = MP	yellow	5 / 4.2 mm	=	200
0252611752	CLI C 1-3 GE/SW AC MP	yellow	5 / 4.2 mm	AC	200
0252611746	CLI C 1-3 GE/SW ET MP	yellow	5 / 4.2 mm	⏚	200
0252611747	CLI C 1-3 GE/SW PET. MP	yellow	5 / 4.2 mm	⏚	200
0252611697	CLI C 1-3 GE/SW Ä MP	yellow	5 / 4.2 mm	Ä	200
0252611699	CLI C 1-3 GE/SW Å MP	yellow	5 / 4.2 mm	Å	200
0252611695	CLI C 1-3 GE/SW Ö MP	yellow	5 / 4.2 mm	Ö	200
0252611741	CLI C 1-3 BL/WS - MP	blue	5 / 4.2 mm	-	200
0252611664	CLI C 1-3 BL/WS N MP	blue	5 / 4.2 mm	N	200
0252611737	CLI C 1-3 RT/WS + MP	red	5 / 4.2 mm	+	200

CLI C 1-3 International colour code (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568251503	CLI C 1-3 SW/WS 0 CD	black	5 / 4.2 mm	0	500
1568251506	CLI C 1-3 BR/WS 1 CD	brown	5 / 4.2 mm	1	500
1568251509	CLI C 1-3 RT/WS 2 CD	red	5 / 4.2 mm	2	500
1568251512	CLI C 1-3 OR/SW 3 CD	orange	5 / 4.2 mm	3	500
1568251514	CLI C 1-3 GE/SW 4 CD	yellow	5 / 4.2 mm	4	500
1568251518	CLI C 1-3 GN/WS 5 CD	green	5 / 4.2 mm	5	500
1568251521	CLI C 1-3 BL/WS 6 CD	blue	5 / 4.2 mm	6	500
1568251524	CLI C 1-3 VI/WS 7 CD	violet	5 / 4.2 mm	7	500
1568251527	CLI C 1-3 GR/SW 8 CD	grey	5 / 4.2 mm	8	500
1568251530	CLI C 1-3 WS/SW 9 CD	white	5 / 4.2 mm	9	500

CLI C 1-3 Numeric sequence (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568251502	CLI C 1-3 GE/SW 0 CD	yellow	5 / 4.2 mm	0	500
1568251000	CLI C 1-3 WS/SW 0 CD	white	5 / 4.2 mm	0	500
1568251505	CLI C 1-3 GE/SW 1 CD	yellow	5 / 4.2 mm	1	500
1568250001	CLI C 1-3 WS/SW 1 CD	white	5 / 4.2 mm	1	500
1568251508	CLI C 1-3 GE/SW 2 CD	yellow	5 / 4.2 mm	2	500
1568250002	CLI C 1-3 WS/SW 2 CD	white	5 / 4.2 mm	2	500
1568251511	CLI C 1-3 GE/SW 3 CD	yellow	5 / 4.2 mm	3	500
1568250003	CLI C 1-3 WS/SW 3 CD	white	5 / 4.2 mm	3	500
1568251514	CLI C 1-3 GE/SW 4 CD	yellow	5 / 4.2 mm	4	500
1568250004	CLI C 1-3 WS/SW 4 CD	white	5 / 4.2 mm	4	500
1568251517	CLI C 1-3 GE/SW 5 CD	yellow	5 / 4.2 mm	5	500
1568250005	CLI C 1-3 WS/SW 5 CD	white	5 / 4.2 mm	5	500
1568251520	CLI C 1-3 GE/SW 6 CD	yellow	5 / 4.2 mm	6	500
1568250006	CLI C 1-3 WS/SW 6 CD	white	5 / 4.2 mm	6	500
1568251523	CLI C 1-3 GE/SW 7 CD	yellow	5 / 4.2 mm	7	500
1568250007	CLI C 1-3 WS/SW 7 CD	white	5 / 4.2 mm	7	500
1568251526	CLI C 1-3 GE/SW 8 CD	yellow	5 / 4.2 mm	8	500
1568250008	CLI C 1-3 WS/SW 8 CD	white	5 / 4.2 mm	8	500
1568251529	CLI C 1-3 GE/SW 9 CD	yellow	5 / 4.2 mm	9	500
1568251530	CLI C 1-3 WS/SW 9 CD	white	5 / 4.2 mm	9	500

CLI C 1-3 Alphabetic (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568251637	CLI C 1-3 GE/SW A CD	●	yellow	5 / 4.2 mm	A	500
1568251021	CLI C 1-3 WS/SW A CD	❍	white	5 / 4.2 mm	A	500
1568251639	CLI C 1-3 GE/SW B CD	●	yellow	5 / 4.2 mm	B	500
1568251022	CLI C 1-3 WS/SW B CD	❍	white	5 / 4.2 mm	B	500
1568251641	CLI C 1-3 GE/SW C CD	●	yellow	5 / 4.2 mm	C	500
1568251023	CLI C 1-3 WS/SW C CD	❍	white	5 / 4.2 mm	C	500
1568251643	CLI C 1-3 GE/SW D CD	●	yellow	5 / 4.2 mm	D	500
1568251024	CLI C 1-3 WS/SW D CD	❍	white	5 / 4.2 mm	D	500
1568251645	CLI C 1-3 GE/SW E CD	●	yellow	5 / 4.2 mm	E	500
1568251025	CLI C 1-3 WS/SW E CD	❍	white	5 / 4.2 mm	E	500
1568251647	CLI C 1-3 GE/SW F CD	●	yellow	5 / 4.2 mm	F	500
1568251026	CLI C 1-3 WS/SW F CD	❍	white	5 / 4.2 mm	F	500
1568251649	CLI C 1-3 GE/SW G CD	●	yellow	5 / 4.2 mm	G	500
1568251027	CLI C 1-3 WS/SW G CD	❍	white	5 / 4.2 mm	G	500
1568251651	CLI C 1-3 GE/SW H CD	●	yellow	5 / 4.2 mm	H	500
1568251028	CLI C 1-3 WS/SW H CD	❍	white	5 / 4.2 mm	H	500
1568251653	CLI C 1-3 GE/SW I CD	●	yellow	5 / 4.2 mm	I	500
1568251029	CLI C 1-3 WS/SW I CD	❍	white	5 / 4.2 mm	I	500
1568251655	CLI C 1-3 GE/SW J CD	●	yellow	5 / 4.2 mm	J	500
1568251030	CLI C 1-3 WS/SW J CD	❍	white	5 / 4.2 mm	J	500
1568251657	CLI C 1-3 GE/SW K CD	●	yellow	5 / 4.2 mm	K	500
1568251031	CLI C 1-3 WS/SW K CD	❍	white	5 / 4.2 mm	K	500
1568251659	CLI C 1-3 GE/SW L CD	●	yellow	5 / 4.2 mm	L	500
1568251032	CLI C 1-3 WS/SW L CD	❍	white	5 / 4.2 mm	L	500
1568251661	CLI C 1-3 GE/SW M CD	●	yellow	5 / 4.2 mm	M	500
1568251033	CLI C 1-3 WS/SW M CD	❍	white	5 / 4.2 mm	M	500
1568251663	CLI C 1-3 GE/SW N CD	●	yellow	5 / 4.2 mm	N	500
1568251034	CLI C 1-3 WS/SW N CD	❍	white	5 / 4.2 mm	N	500
1568251665	CLI C 1-3 GE/SW O CD	●	yellow	5 / 4.2 mm	O	500
1568251035	CLI C 1-3 WS/SW O CD	❍	white	5 / 4.2 mm	O	500
1568251667	CLI C 1-3 GE/SW P CD	●	yellow	5 / 4.2 mm	P	500
1568251036	CLI C 1-3 WS/SW P CD	❍	white	5 / 4.2 mm	P	500
1568251669	CLI C 1-3 GE/SW Q CD	●	yellow	5 / 4.2 mm	Q	500
1568251037	CLI C 1-3 WS/SW Q CD	❍	white	5 / 4.2 mm	Q	500
1568251671	CLI C 1-3 GE/SW R CD	●	yellow	5 / 4.2 mm	R	500
1568251038	CLI C 1-3 WS/SW R CD	❍	white	5 / 4.2 mm	R	500
1568251673	CLI C 1-3 GE/SW S CD	●	yellow	5 / 4.2 mm	S	500
1568251039	CLI C 1-3 WS/SW S CD	❍	white	5 / 4.2 mm	S	500
1568251676	CLI C 1-3 GE/SW T CD	●	yellow	5 / 4.2 mm	T	500
1568251040	CLI C 1-3 WS/SW T CD	❍	white	5 / 4.2 mm	T	500
1568251679	CLI C 1-3 GE/SW U CD	●	yellow	5 / 4.2 mm	U	500
1568251041	CLI C 1-3 WS/SW U CD	❍	white	5 / 4.2 mm	U	500
1568251681	CLI C 1-3 GE/SW V CD	●	yellow	5 / 4.2 mm	V	500
1568251042	CLI C 1-3 WS/SW V CD	❍	white	5 / 4.2 mm	V	500
1568251683	CLI C 1-3 GE/SW W CD	●	yellow	5 / 4.2 mm	W	500
1568251043	CLI C 1-3 WS/SW W CD	❍	white	5 / 4.2 mm	W	500
1568251687	CLI C 1-3 GE/SW X CD	●	yellow	5 / 4.2 mm	X	500
1568251054	CLI C 1-3 WS/SW X CD	❍	white	5 / 4.2 mm	X	500
1568251696	CLI C 1-3 GE/SW Y CD	●	yellow	5 / 4.2 mm	Y	500
1568251045	CLI C 1-3 WS/SW Y CD	❍	white	5 / 4.2 mm	Y	500
1568251698	CLI C 1-3 GE/SW Z CD	●	yellow	5 / 4.2 mm	Z	500
1568251046	CLI C 1-3 WS/SW Z CD	❍	white	5 / 4.2 mm	Z	500

CLI C 1-3 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568251753	CLI C 1-3 GE/SW * CD	●	yellow	5 / 4.2 mm	*	500
1568251738	CLI C 1-3 GE/SW + CD	●	yellow	5 / 4.2 mm	+	500
1568251048	CLI C 1-3 WS/SW + CD	❍	white	5 / 4.2 mm	+	500
1568251740	CLI C 1-3 GE/SW - CD	●	yellow	5 / 4.2 mm	-	500
1568251049	CLI C 1-3 WS/SW - CD	❍	white	5 / 4.2 mm	-	500
1568251748	CLI C 1-3 GE/SW . CD	●	yellow	5 / 4.2 mm	.	500
1568251047	CLI C 1-3 WS/SW . CD	❍	white	5 / 4.2 mm	.	500
1568251742	CLI C 1-3 GE/SW / CD	●	yellow	5 / 4.2 mm	/	500
1568251050	CLI C 1-3 WS/SW / CD	❍	white	5 / 4.2 mm	/	500
1568251750	CLI C 1-3 GE/SW : CD	●	yellow	5 / 4.2 mm	:	500
1568251051	CLI C 1-3 WS/SW : CD	❍	white	5 / 4.2 mm	:	500
1568251751	CLI C 1-3 GE/SW = CD	●	yellow	5 / 4.2 mm	=	500
1568251052	CLI C 1-3 WS/SW = CD	❍	white	5 / 4.2 mm	=	500
1568251752	CLI C 1-3 GE/SW AC CD	●	yellow	5 / 4.2 mm	AC	500
1568251746	CLI C 1-3 GE/SW ET CD	●	yellow	5 / 4.2 mm	⏚	500
1568251053	CLI C 1-3 WS/SW ET CD	❍	white	5 / 4.2 mm	⏚	500
1568251747	CLI C 1-3 GE/SW PET. CD	●	yellow	5 / 4.2 mm	⏚	500
1568251058	CLI C 1-3 WS/SW PET. CD	❍	white	5 / 4.2 mm	⏚	500
1568251797	CLI C 1-3 GE/SW Ä CD	●	yellow	5 / 4.2 mm	Ä	500
1568251055	CLI C 1-3 WS/SW ? CD	❍	white	5 / 4.2 mm	?	500
1568251799	CLI C 1-3 GE/SW Å CD	●	yellow	5 / 4.2 mm	Å	500
1568251735	CLI C 1-3 GE/SW Æ CD	●	yellow	5 / 4.2 mm	Æ	500
1568251795	CLI C 1-3 GE/SW Ö CD	●	yellow	5 / 4.2 mm	Ö	500
1568251057	CLI C 1-3 WS/SW Ö CD	❍	white	5 / 4.2 mm	Ö	500
1568251736	CLI C 1-3 GE/SW Ø CD	●	yellow	5 / 4.2 mm	Ø	500
1568251741	CLI C 1-3 BL/WS - CD	●	blue	5 / 4.2 mm	-	500
1568251664	CLI C 1-3 BL/WS N CD	●	blue	5 / 4.2 mm	N	500
1568251737	CLI C 1-3 RT/WS + CD	●	red	5 / 4.2 mm	+	500

CLI C 1-6 Numeric sequence (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252711522	CLI C 1-6 GE/SW 01 MP	yellow	5 / 4.2 mm	01	100
0252711523	CLI C 1-6 GE/SW 02 MP	yellow	5 / 4.2 mm	02	100
0252711524	CLI C 1-6 GE/SW 03 MP	yellow	5 / 4.2 mm	03	100
0252711525	CLI C 1-6 GE/SW 04 MP	yellow	5 / 4.2 mm	04	100
0252711526	CLI C 1-6 GE/SW 05 MP	yellow	5 / 4.2 mm	05	100
0252711527	CLI C 1-6 GE/SW 06 MP	yellow	5 / 4.2 mm	06	100
0252711528	CLI C 1-6 GE/SW 07 MP	yellow	5 / 4.2 mm	07	100
0252711529	CLI C 1-6 GE/SW 08 MP	yellow	5 / 4.2 mm	08	100
0252711530	CLI C 1-6 GE/SW 09 MP	yellow	5 / 4.2 mm	09	100
0252711531	CLI C 1-6 GE/SW 10 MP	yellow	5 / 4.2 mm	10	100
0252711532	CLI C 1-6 GE/SW 11 MP	yellow	5 / 4.2 mm	11	100
0252711533	CLI C 1-6 GE/SW 12 MP	yellow	5 / 4.2 mm	12	100
0252711534	CLI C 1-6 GE/SW 13 MP	yellow	5 / 4.2 mm	13	100
0252711535	CLI C 1-6 GE/SW 14 MP	yellow	5 / 4.2 mm	14	100
0252711536	CLI C 1-6 GE/SW 15 MP	yellow	5 / 4.2 mm	15	100
0252711537	CLI C 1-6 GE/SW 16 MP	yellow	5 / 4.2 mm	16	100
0252711538	CLI C 1-6 GE/SW 17 MP	yellow	5 / 4.2 mm	17	100
0252711539	CLI C 1-6 GE/SW 18 MP	yellow	5 / 4.2 mm	18	100
0252711540	CLI C 1-6 GE/SW 19 MP	yellow	5 / 4.2 mm	19	100
0252711541	CLI C 1-6 GE/SW 20 MP	yellow	5 / 4.2 mm	20	100
0252711542	CLI C 1-6 GE/SW 21 MP	yellow	5 / 4.2 mm	21	100
0252711543	CLI C 1-6 GE/SW 22 MP	yellow	5 / 4.2 mm	22	100
0252711544	CLI C 1-6 GE/SW 23 MP	yellow	5 / 4.2 mm	23	100
0252711545	CLI C 1-6 GE/SW 24 MP	yellow	5 / 4.2 mm	24	100
0252711546	CLI C 1-6 GE/SW 25 MP	yellow	5 / 4.2 mm	25	100
0252711547	CLI C 1-6 GE/SW 26 MP	yellow	5 / 4.2 mm	26	100
0252711548	CLI C 1-6 GE/SW 27 MP	yellow	5 / 4.2 mm	27	100
0252711549	CLI C 1-6 GE/SW 28 MP	yellow	5 / 4.2 mm	28	100
0252711550	CLI C 1-6 GE/SW 29 MP	yellow	5 / 4.2 mm	29	100
0252711551	CLI C 1-6 GE/SW 30 MP	yellow	5 / 4.2 mm	30	100
0252711552	CLI C 1-6 GE/SW 31 MP	yellow	5 / 4.2 mm	31	100
0252711553	CLI C 1-6 GE/SW 32 MP	yellow	5 / 4.2 mm	32	100
0252711554	CLI C 1-6 GE/SW 33 MP	yellow	5 / 4.2 mm	33	100
0252711555	CLI C 1-6 GE/SW 34 MP	yellow	5 / 4.2 mm	34	100
0252711556	CLI C 1-6 GE/SW 35 MP	yellow	5 / 4.2 mm	35	100
0252711557	CLI C 1-6 GE/SW 36 MP	yellow	5 / 4.2 mm	36	100
0252711558	CLI C 1-6 GE/SW 37 MP	yellow	5 / 4.2 mm	37	100
0252711559	CLI C 1-6 GE/SW 38 MP	yellow	5 / 4.2 mm	38	100
0252711560	CLI C 1-6 GE/SW 39 MP	yellow	5 / 4.2 mm	39	100
0252711561	CLI C 1-6 GE/SW 40 MP	yellow	5 / 4.2 mm	40	100
0252711562	CLI C 1-6 GE/SW 41 MP	yellow	5 / 4.2 mm	41	100
0252711563	CLI C 1-6 GE/SW 42 MP	yellow	5 / 4.2 mm	42	100
0252711564	CLI C 1-6 GE/SW 43 MP	yellow	5 / 4.2 mm	43	100
0252711565	CLI C 1-6 GE/SW 44 MP	yellow	5 / 4.2 mm	44	100
0252711566	CLI C 1-6 GE/SW 45 MP	yellow	5 / 4.2 mm	45	100
0252711567	CLI C 1-6 GE/SW 46 MP	yellow	5 / 4.2 mm	46	100
0252711568	CLI C 1-6 GE/SW 47 MP	yellow	5 / 4.2 mm	47	100
0252711569	CLI C 1-6 GE/SW 48 MP	yellow	5 / 4.2 mm	48	100
0252711570	CLI C 1-6 GE/SW 49 MP	yellow	5 / 4.2 mm	49	100
0252711571	CLI C 1-6 GE/SW 50 MP	yellow	5 / 4.2 mm	50	100
0252711572	CLI C 1-6 GE/SW 51 MP	yellow	5 / 4.2 mm	51	100
0252711573	CLI C 1-6 GE/SW 52 MP	yellow	5 / 4.2 mm	52	100
0252711574	CLI C 1-6 GE/SW 53 MP	yellow	5 / 4.2 mm	53	100
0252711575	CLI C 1-6 GE/SW 54 MP	yellow	5 / 4.2 mm	54	100
0252711576	CLI C 1-6 GE/SW 55 MP	yellow	5 / 4.2 mm	55	100
0252711577	CLI C 1-6 GE/SW 56 MP	yellow	5 / 4.2 mm	56	100
0252711578	CLI C 1-6 GE/SW 57 MP	yellow	5 / 4.2 mm	57	100
0252711579	CLI C 1-6 GE/SW 58 MP	yellow	5 / 4.2 mm	58	100
0252711580	CLI C 1-6 GE/SW 59 MP	yellow	5 / 4.2 mm	59	100
0252711581	CLI C 1-6 GE/SW 60 MP	yellow	5 / 4.2 mm	60	100

CLI C 1-6 Numeric sequence (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252711582	CLI C 1-6 GE/SW 61 MP	yellow	5 / 4.2 mm	61	100
0252711583	CLI C 1-6 GE/SW 62 MP	yellow	5 / 4.2 mm	62	100
0252711584	CLI C 1-6 GE/SW 63 MP	yellow	5 / 4.2 mm	63	100
0252711585	CLI C 1-6 GE/SW 64 MP	yellow	5 / 4.2 mm	64	100
0252711586	CLI C 1-6 GE/SW 65 MP	yellow	5 / 4.2 mm	65	100
0252711587	CLI C 1-6 GE/SW 66 MP	yellow	5 / 4.2 mm	66	100
0252711588	CLI C 1-6 GE/SW 67 MP	yellow	5 / 4.2 mm	67	100
0252711589	CLI C 1-6 GE/SW 68 MP	yellow	5 / 4.2 mm	68	100
0252711590	CLI C 1-6 GE/SW 69 MP	yellow	5 / 4.2 mm	69	100
0252711591	CLI C 1-6 GE/SW 70 MP	yellow	5 / 4.2 mm	70	100
0252711592	CLI C 1-6 GE/SW 71 MP	yellow	5 / 4.2 mm	71	100
0252711593	CLI C 1-6 GE/SW 72 MP	yellow	5 / 4.2 mm	72	100
0252711594	CLI C 1-6 GE/SW 73 MP	yellow	5 / 4.2 mm	73	100
0252711595	CLI C 1-6 GE/SW 74 MP	yellow	5 / 4.2 mm	74	100
0252711596	CLI C 1-6 GE/SW 75 MP	yellow	5 / 4.2 mm	75	100
0252711597	CLI C 1-6 GE/SW 76 MP	yellow	5 / 4.2 mm	76	100
0252711598	CLI C 1-6 GE/SW 77 MP	yellow	5 / 4.2 mm	77	100
0252711599	CLI C 1-6 GE/SW 78 MP	yellow	5 / 4.2 mm	78	100
0252711600	CLI C 1-6 GE/SW 79 MP	yellow	5 / 4.2 mm	79	100
0252711601	CLI C 1-6 GE/SW 80 MP	yellow	5 / 4.2 mm	80	100
0252711602	CLI C 1-6 GE/SW 81 MP	yellow	5 / 4.2 mm	81	100
0252711603	CLI C 1-6 GE/SW 82 MP	yellow	5 / 4.2 mm	82	100
0252711604	CLI C 1-6 GE/SW 83 MP	yellow	5 / 4.2 mm	83	100
0252711605	CLI C 1-6 GE/SW 84 MP	yellow	5 / 4.2 mm	84	100
0252711606	CLI C 1-6 GE/SW 85 MP	yellow	5 / 4.2 mm	85	100
0252711607	CLI C 1-6 GE/SW 86 MP	yellow	5 / 4.2 mm	86	100
0252711608	CLI C 1-6 GE/SW 87 MP	yellow	5 / 4.2 mm	87	100
0252711609	CLI C 1-6 GE/SW 88 MP	yellow	5 / 4.2 mm	88	100
0252711610	CLI C 1-6 GE/SW 89 MP	yellow	5 / 4.2 mm	89	100
0252711611	CLI C 1-6 GE/SW 90 MP	yellow	5 / 4.2 mm	90	100
0252711612	CLI C 1-6 GE/SW 91 MP	yellow	5 / 4.2 mm	91	100
0252711613	CLI C 1-6 GE/SW 92 MP	yellow	5 / 4.2 mm	92	100
0252711614	CLI C 1-6 GE/SW 93 MP	yellow	5 / 4.2 mm	93	100
0252711615	CLI C 1-6 GE/SW 94 MP	yellow	5 / 4.2 mm	94	100
0252711616	CLI C 1-6 GE/SW 95 MP	yellow	5 / 4.2 mm	95	100
0252711617	CLI C 1-6 GE/SW 96 MP	yellow	5 / 4.2 mm	96	100
0252711618	CLI C 1-6 GE/SW 97 MP	yellow	5 / 4.2 mm	97	100
0252711619	CLI C 1-6 GE/SW 98 MP	yellow	5 / 4.2 mm	98	100
0252711620	CLI C 1-6 GE/SW 99 MP	yellow	5 / 4.2 mm	99	100

CLI C 1-6 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252711726	CLI C 1-6 GE/SW A1 MP	yellow	5 / 4.2 mm	A1	100
0252711727	CLI C 1-6 GE/SW A2 MP	yellow	5 / 4.2 mm	A2	100
0252711728	CLI C 1-6 GE/SW L1 MP	yellow	5 / 4.2 mm	L1	100
0252711729	CLI C 1-6 GE/SW L2 MP	yellow	5 / 4.2 mm	L2	100
0252711730	CLI C 1-6 GE/SW L3 MP	yellow	5 / 4.2 mm	L3	100
0252711733	CLI C 1-6 GE/SW PE MP	yellow	5 / 4.2 mm	PE	100

CLI C 1-9 Special characters (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0252711734	CLI C 1-9 GE/SW PEN MP	yellow	5 / 4.2 mm	PEN	100

CLI C 1-6 Numeric sequence (CD)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1868811522	CLI C 1-6 GE/SW 01 CD	yellow	5 / 4.2 mm	01	250
1868811523	CLI C 1-6 GE/SW 02 CD	yellow	5 / 4.2 mm	02	250
1868811524	CLI C 1-6 GE/SW 03 CD	yellow	5 / 4.2 mm	03	250
1868811525	CLI C 1-6 GE/SW 04 CD	yellow	5 / 4.2 mm	04	250
1868811526	CLI C 1-6 GE/SW 05 CD	yellow	5 / 4.2 mm	05	250
1868811527	CLI C 1-6 GE/SW 06 CD	yellow	5 / 4.2 mm	06	250
1868811528	CLI C 1-6 GE/SW 07 CD	yellow	5 / 4.2 mm	07	250
1868811529	CLI C 1-6 GE/SW 08 CD	yellow	5 / 4.2 mm	08	250
1868811530	CLI C 1-6 GE/SW 09 CD	yellow	5 / 4.2 mm	09	250
1868811531	CLI C 1-6 GE/SW 10 CD	yellow	5 / 4.2 mm	10	250
1868811532	CLI C 1-6 GE/SW 11 CD	yellow	5 / 4.2 mm	11	250
1868811533	CLI C 1-6 GE/SW 12 CD	yellow	5 / 4.2 mm	12	250
1868811534	CLI C 1-6 GE/SW 13 CD	yellow	5 / 4.2 mm	13	250
1868811535	CLI C 1-6 GE/SW 14 CD	yellow	5 / 4.2 mm	14	250
1868811536	CLI C 1-6 GE/SW 15 CD	yellow	5 / 4.2 mm	15	250
1868811537	CLI C 1-6 GE/SW 16 CD	yellow	5 / 4.2 mm	16	250
1868811538	CLI C 1-6 GE/SW 17 CD	yellow	5 / 4.2 mm	17	250
1868811539	CLI C 1-6 GE/SW 18 CD	yellow	5 / 4.2 mm	18	250
1868811540	CLI C 1-6 GE/SW 19 CD	yellow	5 / 4.2 mm	19	250
1868811541	CLI C 1-6 GE/SW 20 CD	yellow	5 / 4.2 mm	20	250
1868811542	CLI C 1-6 GE/SW 21 CD	yellow	5 / 4.2 mm	21	250
1868811543	CLI C 1-6 GE/SW 22 CD	yellow	5 / 4.2 mm	22	250
1868811544	CLI C 1-6 GE/SW 23 CD	yellow	5 / 4.2 mm	23	250
1868811545	CLI C 1-6 GE/SW 24 CD	yellow	5 / 4.2 mm	24	250
1868811546	CLI C 1-6 GE/SW 25 CD	yellow	5 / 4.2 mm	25	250
1868811547	CLI C 1-6 GE/SW 26 CD	yellow	5 / 4.2 mm	26	250
1868811548	CLI C 1-6 GE/SW 27 CD	yellow	5 / 4.2 mm	27	250
1868811549	CLI C 1-6 GE/SW 28 CD	yellow	5 / 4.2 mm	28	250
1868811550	CLI C 1-6 GE/SW 29 CD	yellow	5 / 4.2 mm	29	250
1868811551	CLI C 1-6 GE/SW 30 CD	yellow	5 / 4.2 mm	30	250
1868811552	CLI C 1-6 GE/SW 31 CD	yellow	5 / 4.2 mm	31	250
1868811553	CLI C 1-6 GE/SW 32 CD	yellow	5 / 4.2 mm	32	250
1868811554	CLI C 1-6 GE/SW 33 CD	yellow	5 / 4.2 mm	33	250
1868811555	CLI C 1-6 GE/SW 34 CD	yellow	5 / 4.2 mm	34	250
1868811556	CLI C 1-6 GE/SW 35 CD	yellow	5 / 4.2 mm	35	250
1868811557	CLI C 1-6 GE/SW 36 CD	yellow	5 / 4.2 mm	36	250
1868811558	CLI C 1-6 GE/SW 37 CD	yellow	5 / 4.2 mm	37	250
1868811559	CLI C 1-6 GE/SW 38 CD	yellow	5 / 4.2 mm	38	250
1868811560	CLI C 1-6 GE/SW 39 CD	yellow	5 / 4.2 mm	39	250
1868811561	CLI C 1-6 GE/SW 40 CD	yellow	5 / 4.2 mm	40	250
1868811562	CLI C 1-6 GE/SW 41 CD	yellow	5 / 4.2 mm	41	250
1868811563	CLI C 1-6 GE/SW 42 CD	yellow	5 / 4.2 mm	42	250
1868811564	CLI C 1-6 GE/SW 43 CD	yellow	5 / 4.2 mm	43	250
1868811565	CLI C 1-6 GE/SW 44 CD	yellow	5 / 4.2 mm	44	250
1868811566	CLI C 1-6 GE/SW 45 CD	yellow	5 / 4.2 mm	45	250
1868811567	CLI C 1-6 GE/SW 46 CD	yellow	5 / 4.2 mm	46	250
1868811568	CLI C 1-6 GE/SW 47 CD	yellow	5 / 4.2 mm	47	250
1868811569	CLI C 1-6 GE/SW 48 CD	yellow	5 / 4.2 mm	48	250
1868811570	CLI C 1-6 GE/SW 49 CD	yellow	5 / 4.2 mm	49	250
1868811571	CLI C 1-6 GE/SW 50 CD	yellow	5 / 4.2 mm	50	250

CableLine® – CLI C – closed wire markers

CLI C 1-6 Numeric sequence (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1868811572	CLI C 1-6 GE/SW 51 CD	yellow	5 / 4.2 mm	51	250
1868811573	CLI C 1-6 GE/SW 52 CD	yellow	5 / 4.2 mm	52	250
1868811574	CLI C 1-6 GE/SW 53 CD	yellow	5 / 4.2 mm	53	250
1868811575	CLI C 1-6 GE/SW 54 CD	yellow	5 / 4.2 mm	54	250
1868811576	CLI C 1-6 GE/SW 55 CD	yellow	5 / 4.2 mm	55	250
1868811577	CLI C 1-6 GE/SW 56 CD	yellow	5 / 4.2 mm	56	250
1868811578	CLI C 1-6 GE/SW 57 CD	yellow	5 / 4.2 mm	57	250
1868811579	CLI C 1-6 GE/SW 58 CD	yellow	5 / 4.2 mm	58	250
1868811580	CLI C 1-6 GE/SW 59 CD	yellow	5 / 4.2 mm	59	250
1868811581	CLI C 1-6 GE/SW 60 CD	yellow	5 / 4.2 mm	60	250
1868811582	CLI C 1-6 GE/SW 61 CD	yellow	5 / 4.2 mm	61	250
1868811583	CLI C 1-6 GE/SW 62 CD	yellow	5 / 4.2 mm	62	250
1868811584	CLI C 1-6 GE/SW 63 CD	yellow	5 / 4.2 mm	63	250
1868811585	CLI C 1-6 GE/SW 64 CD	yellow	5 / 4.2 mm	64	250
1868811586	CLI C 1-6 GE/SW 65 CD	yellow	5 / 4.2 mm	65	250
1868811587	CLI C 1-6 GE/SW 66 CD	yellow	5 / 4.2 mm	66	250
1868811588	CLI C 1-6 GE/SW 67 CD	yellow	5 / 4.2 mm	67	250
1868811589	CLI C 1-6 GE/SW 68 CD	yellow	5 / 4.2 mm	68	250
1868811590	CLI C 1-6 GE/SW 69 CD	yellow	5 / 4.2 mm	69	250
1868811591	CLI C 1-6 GE/SW 70 CD	yellow	5 / 4.2 mm	70	250
1868811592	CLI C 1-6 GE/SW 71 CD	yellow	5 / 4.2 mm	71	250
1868811593	CLI C 1-6 GE/SW 72 CD	yellow	5 / 4.2 mm	72	250
1868811594	CLI C 1-6 GE/SW 73 CD	yellow	5 / 4.2 mm	73	250
1868811595	CLI C 1-6 GE/SW 74 CD	yellow	5 / 4.2 mm	74	250
1868811596	CLI C 1-6 GE/SW 75 CD	yellow	5 / 4.2 mm	75	250
1868811597	CLI C 1-6 GE/SW 76 CD	yellow	5 / 4.2 mm	76	250
1868811598	CLI C 1-6 GE/SW 77 CD	yellow	5 / 4.2 mm	77	250
1868811599	CLI C 1-6 GE/SW 78 CD	yellow	5 / 4.2 mm	78	250
1868811600	CLI C 1-6 GE/SW 79 CD	yellow	5 / 4.2 mm	79	250
1868811601	CLI C 1-6 GE/SW 80 CD	yellow	5 / 4.2 mm	80	250
1868811602	CLI C 1-6 GE/SW 81 CD	yellow	5 / 4.2 mm	81	250
1868811603	CLI C 1-6 GE/SW 82 CD	yellow	5 / 4.2 mm	82	250
1868811604	CLI C 1-6 GE/SW 83 CD	yellow	5 / 4.2 mm	83	250
1868811605	CLI C 1-6 GE/SW 84 CD	yellow	5 / 4.2 mm	84	250
1868811606	CLI C 1-6 GE/SW 85 CD	yellow	5 / 4.2 mm	85	250
1868811607	CLI C 1-6 GE/SW 86 CD	yellow	5 / 4.2 mm	86	250
1868811608	CLI C 1-6 GE/SW 87 CD	yellow	5 / 4.2 mm	87	250
1868811609	CLI C 1-6 GE/SW 88 CD	yellow	5 / 4.2 mm	88	250
1868811610	CLI C 1-6 GE/SW 89 CD	yellow	5 / 4.2 mm	89	250
1868811611	CLI C 1-6 GE/SW 90 CD	yellow	5 / 4.2 mm	90	250
1868811612	CLI C 1-6 GE/SW 91 CD	yellow	5 / 4.2 mm	91	250
1868811613	CLI C 1-6 GE/SW 92 CD	yellow	5 / 4.2 mm	92	250
1868811614	CLI C 1-6 GE/SW 93 CD	yellow	5 / 4.2 mm	93	250
1868811615	CLI C 1-6 GE/SW 94 CD	yellow	5 / 4.2 mm	94	250
1868811616	CLI C 1-6 GE/SW 95 CD	yellow	5 / 4.2 mm	95	250
1868811617	CLI C 1-6 GE/SW 96 CD	yellow	5 / 4.2 mm	96	250
1868811618	CLI C 1-6 GE/SW 97 CD	yellow	5 / 4.2 mm	97	250
1868811619	CLI C 1-6 GE/SW 98 CD	yellow	5 / 4.2 mm	98	250
1868811620	CLI C 1-6 GE/SW 99 CD	yellow	5 / 4.2 mm	99	250

CLI C 1-6 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1868811726	CLI C 1-6 GE/SW A1 CD	yellow	5 / 4.2 mm	A1	250
1868811727	CLI C 1-6 GE/SW A2 CD	yellow	5 / 4.2 mm	A2	250
1868811739	CLI C 1-6 GE/SW I1 CD	yellow	5 / 4.2 mm	I1	250
1868811740	CLI C 1-6 GE/SW I2 CD	yellow	5 / 4.2 mm	I2	250
1868811741	CLI C 1-6 GE/SW IC CD	yellow	5 / 4.2 mm	IC	250
1868811728	CLI C 1-6 GE/SW L1 CD	yellow	5 / 4.2 mm	L1	250
1868811729	CLI C 1-6 GE/SW L2 CD	yellow	5 / 4.2 mm	L2	250
1868811730	CLI C 1-6 GE/SW L3 CD	yellow	5 / 4.2 mm	L3	250
1868811731	CLI C 1-6 GE/SW MP CD	yellow	5 / 4.2 mm	MP	250
1868811733	CLI C 1-6 GE/SW PE CD	yellow	5 / 4.2 mm	PE	250
1868811735	CLI C 1-6 GE/SW U1 CD	yellow	5 / 4.2 mm	U1	250
1868811736	CLI C 1-6 GE/SW U2 CD	yellow	5 / 4.2 mm	U2	250
1868811737	CLI C 1-6 GE/SW U3 CD	yellow	5 / 4.2 mm	U3	250
1868811738	CLI C 1-6 GE/SW UN CD	yellow	5 / 4.2 mm	UN	250
1868811150	CLI C 1-6 GE/SW X1 CD	yellow	5 / 4.2 mm	X1	250
1868811151	CLI C 1-6 GE/SW X2 CD	yellow	5 / 4.2 mm	X2	250

CLI C 1-9 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1868811734	CLI C 1-9 GE/SW PEN CD	yellow	5 / 4.2 mm	PEN	125

CLI C 2-4 International colour code (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0251311503	CLI C 2-4 SW/WS 0 MP	black	8 / 7 mm	0	100
0251311506	CLI C 2-4 BR/WS 1 MP	brown	8 / 7 mm	1	100
0251311509	CLI C 2-4 RT/WS 2 MP	red	8 / 7 mm	2	100
0251311512	CLI C 2-4 OR/SW 3 MP	orange	8 / 7 mm	3	100
0251311514	CLI C 2-4 GE/SW 4 MP	yellow	8 / 7 mm	4	100
0251311518	CLI C 2-4 GN/WS 5 MP	green	8 / 7 mm	5	100
0251311521	CLI C 2-4 BL/WS 6 MP	blue	8 / 7 mm	6	100
0251311524	CLI C 2-4 VI/WS 7 MP	violet	8 / 7 mm	7	100
0251311527	CLI C 2-4 GR/SW 8 MP	grey	8 / 7 mm	8	100
0251310009	CLI C 2-4 WS/SW 9 MP	white	8 / 7 mm	9	100

CableLine® – CLI C – closed wire markers

CLI C 2-4 Numeric sequence (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack

Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
0251311502	CLI C 2-4 GE/SW 0 MP		yellow	8 / 7 mm	0	100
0251311000	CLI C 2-4 WS/SW 0 MP		white	8 / 7 mm	0	100
0251311505	CLI C 2-4 GE/SW 1 MP		yellow	8 / 7 mm	1	100
0251310001	CLI C 2-4 WS/SW 1 MP		white	8 / 7 mm	1	100
0251311508	CLI C 2-4 GE/SW 2 MP		yellow	8 / 7 mm	2	100
0251310002	CLI C 2-4 WS/SW 2 MP		white	8 / 7 mm	2	100
0251311511	CLI C 2-4 GE/SW 3 MP		yellow	8 / 7 mm	3	100
0251310003	CLI C 2-4 WS/SW 3 MP		white	8 / 7 mm	3	100
0251311514	CLI C 2-4 GE/SW 4 MP		yellow	8 / 7 mm	4	100
0251310004	CLI C 2-4 WS/SW 4 MP		white	8 / 7 mm	4	100
0251311517	CLI C 2-4 GE/SW 5 MP		yellow	8 / 7 mm	5	100
0251310005	CLI C 2-4 WS/SW 5 MP		white	8 / 7 mm	5	100
0251311520	CLI C 2-4 GE/SW 6 MP		yellow	8 / 7 mm	6	100
0251310006	CLI C 2-4 WS/SW 6 MP		white	8 / 7 mm	6	100
0251311523	CLI C 2-4 GE/SW 7 MP		yellow	8 / 7 mm	7	100
0251310007	CLI C 2-4 WS/SW 7 MP		white	8 / 7 mm	7	100
0251311526	CLI C 2-4 GE/SW 8 MP		yellow	8 / 7 mm	8	100
0251310008	CLI C 2-4 WS/SW 8 MP		white	8 / 7 mm	8	100
0251311529	CLI C 2-4 GE/SW 9 MP		yellow	8 / 7 mm	9	100
0251310009	CLI C 2-4 WS/SW 9 MP		white	8 / 7 mm	9	100

CLI C 2-4 Alphabetic (MulitPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack

Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
0251311637	CLI C 2-4 GE/SW A MP		yellow	8 / 7 mm	A	100
0251311639	CLI C 2-4 GE/SW B MP		yellow	8 / 7 mm	B	100
0251311641	CLI C 2-4 GE/SW C MP		yellow	8 / 7 mm	C	100
0251311643	CLI C 2-4 GE/SW D MP		yellow	8 / 7 mm	D	100
0251311645	CLI C 2-4 GE/SW E MP		yellow	8 / 7 mm	E	100
0251311647	CLI C 2-4 GE/SW F MP		yellow	8 / 7 mm	F	100
0251311649	CLI C 2-4 GE/SW G MP		yellow	8 / 7 mm	G	100
0251311651	CLI C 2-4 GE/SW H MP		yellow	8 / 7 mm	H	100
0251311653	CLI C 2-4 GE/SW I MP		yellow	8 / 7 mm	I	100
0251311655	CLI C 2-4 GE/SW J MP		yellow	8 / 7 mm	J	100
0251311657	CLI C 2-4 GE/SW K MP		yellow	8 / 7 mm	K	100
0251311659	CLI C 2-4 GE/SW L MP		yellow	8 / 7 mm	L	100
0251311661	CLI C 2-4 GE/SW M MP		yellow	8 / 7 mm	M	100
0251311663	CLI C 2-4 GE/SW N MP		yellow	8 / 7 mm	N	100
0251311665	CLI C 2-4 GE/SW O MP		yellow	8 / 7 mm	O	100
0251311667	CLI C 2-4 GE/SW P MP		yellow	8 / 7 mm	P	100
0251311669	CLI C 2-4 GE/SW Q MP		yellow	8 / 7 mm	Q	100
0251311671	CLI C 2-4 GE/SW R MP		yellow	8 / 7 mm	R	100
0251311673	CLI C 2-4 GE/SW S MP		yellow	8 / 7 mm	S	100
0251311676	CLI C 2-4 GE/SW T MP		yellow	8 / 7 mm	T	100
0251311679	CLI C 2-4 GE/SW U MP		yellow	8 / 7 mm	U	100
0251311681	CLI C 2-4 GE/SW V MP		yellow	8 / 7 mm	V	100
0251311683	CLI C 2-4 GE/SW W MP		yellow	8 / 7 mm	W	100
0251311687	CLI C 2-4 GE/SW X MP		yellow	8 / 7 mm	X	100
0251311696	CLI C 2-4 GE/SW Y MP		yellow	8 / 7 mm	Y	100
0251311698	CLI C 2-4 GE/SW Z MP		yellow	8 / 7 mm	Z	100

CLI C 2-4 Special characters (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0251311738	CLI C 2-4 GE/SW + MP	yellow	8 / 7 mm	+	100
0251311048	CLI C 2-4 WS/SW + MP	white	8 / 7 mm	+	100
0251311740	CLI C 2-4 GE/SW - MP	yellow	8 / 7 mm	-	100
0251311049	CLI C 2-4 WS/SW - MP	white	8 / 7 mm	-	100
0251311748	CLI C 2-4 GE/SW . MP	yellow	8 / 7 mm	.	100
0251311742	CLI C 2-4 GE/SW / MP	yellow	8 / 7 mm	/	100
0251311750	CLI C 2-4 GE/SW : MP	yellow	8 / 7 mm	:	100
0251311751	CLI C 2-4 GE/SW = MP	yellow	8 / 7 mm	=	100
0251311752	CLI C 2-4 GE/SW AC MP	yellow	8 / 7 mm	AC	100
0251311746	CLI C 2-4 GE/SW ET MP	yellow	8 / 7 mm	⏚	100
0251311747	CLI C 2-4 GE/SW PET. MP	yellow	8 / 7 mm	⏚	100
0251311697	CLI C 2-4 GE/SW Ä MP	yellow	8 / 7 mm	Ä	100
0251311699	CLI C 2-4 GE/SW Å MP	yellow	8 / 7 mm	Å	100
0251311735	CLI C 2-4 GE/SW Æ MP	yellow	8 / 7 mm	Æ	100
0251311695	CLI C 2-4 GE/SW Ö MP	yellow	8 / 7 mm	Ö	100
0251311736	CLI C 2-4 GE/SW Ø MP	yellow	8 / 7 mm	Ø	100

CLI C 2-4 International colour code (CD)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568261503	CLI C 2-4 SW/WS 0 CD	black	8 / 7 mm	0	250
1568261506	CLI C 2-4 BR/WS 1 CD	brown	8 / 7 mm	1	250
1568261509	CLI C 2-4 RT/WS 2 CD	red	8 / 7 mm	2	250
1568261512	CLI C 2-4 OR/SW 3 CD	orange	8 / 7 mm	3	250
1568261514	CLI C 2-4 GE/SW 4 CD	yellow	8 / 7 mm	4	250
1568261518	CLI C 2-4 GN/WS 5 CD	green	8 / 7 mm	5	250
1568261521	CLI C 2-4 BL/WS 6 CD	blue	8 / 7 mm	6	250
1568261524	CLI C 2-4 VI/WS 7 CD	violet	8 / 7 mm	7	250
1568261527	CLI C 2-4 GR/SW 8 CD	grey	8 / 7 mm	8	250
1568261530	CLI C 2-4 WS/SW 9 CD	white	8 / 7 mm	9	250

CLI C 2-4 Numeric sequence (CD)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568261502	CLI C 2-4 GE/SW 0 CD	yellow	8 / 7 mm	0	250
1568261505	CLI C 2-4 GE/SW 1 CD	yellow	8 / 7 mm	1	250
1568261508	CLI C 2-4 GE/SW 2 CD	yellow	8 / 7 mm	2	250
1568261511	CLI C 2-4 GE/SW 3 CD	yellow	8 / 7 mm	3	250
1568261514	CLI C 2-4 GE/SW 4 CD	yellow	8 / 7 mm	4	250
1568261517	CLI C 2-4 GE/SW 5 CD	yellow	8 / 7 mm	5	250
1568261520	CLI C 2-4 GE/SW 6 CD	yellow	8 / 7 mm	6	250
1568261523	CLI C 2-4 GE/SW 7 CD	yellow	8 / 7 mm	7	250
1568261526	CLI C 2-4 GE/SW 8 CD	yellow	8 / 7 mm	8	250
1568261529	CLI C 2-4 GE/SW 9 CD	yellow	8 / 7 mm	9	250

CLI C 2-4 Alphabetic (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568261637	CLI C 2-4 GE/SW A CD		yellow	8 / 7 mm	A	250
1568261639	CLI C 2-4 GE/SW B CD		yellow	8 / 7 mm	B	250
1568261641	CLI C 2-4 GE/SW C CD		yellow	8 / 7 mm	C	250
1568261643	CLI C 2-4 GE/SW D CD		yellow	8 / 7 mm	D	250
1568261645	CLI C 2-4 GE/SW E CD		yellow	8 / 7 mm	E	250
1568261647	CLI C 2-4 GE/SW F CD		yellow	8 / 7 mm	F	250
1568261649	CLI C 2-4 GE/SW G CD		yellow	8 / 7 mm	G	250
1568261651	CLI C 2-4 GE/SW H CD		yellow	8 / 7 mm	H	250
1568261653	CLI C 2-4 GE/SW I CD		yellow	8 / 7 mm	I	250
1568261655	CLI C 2-4 GE/SW J CD		yellow	8 / 7 mm	J	250
1568261657	CLI C 2-4 GE/SW K CD		yellow	8 / 7 mm	K	250
1568261659	CLI C 2-4 GE/SW L CD		yellow	8 / 7 mm	L	250
1568261661	CLI C 2-4 GE/SW M CD		yellow	8 / 7 mm	M	250
1568261663	CLI C 2-4 GE/SW N CD		yellow	8 / 7 mm	N	250
1568261665	CLI C 2-4 GE/SW O CD		yellow	8 / 7 mm	O	250
1568261667	CLI C 2-4 GE/SW P CD		yellow	8 / 7 mm	P	250
1568261669	CLI C 2-4 GE/SW Q CD		yellow	8 / 7 mm	Q	250
1568261671	CLI C 2-4 GE/SW R CD		yellow	8 / 7 mm	R	250
1568261673	CLI C 2-4 GE/SW S CD		yellow	8 / 7 mm	S	250
1568261676	CLI C 2-4 GE/SW T CD		yellow	8 / 7 mm	T	250
1568261679	CLI C 2-4 GE/SW U CD		yellow	8 / 7 mm	U	250
1568261681	CLI C 2-4 GE/SW V CD		yellow	8 / 7 mm	V	250
1568261683	CLI C 2-4 GE/SW W CD		yellow	8 / 7 mm	W	250
1568261687	CLI C 2-4 GE/SW X CD		yellow	8 / 7 mm	X	250
1568261696	CLI C 2-4 GE/SW Y CD		yellow	8 / 7 mm	Y	250
1568261698	CLI C 2-4 GE/SW Z CD		yellow	8 / 7 mm	Z	250

CLI C 2-4 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568261738	CLI C 2-4 GE/SW + CD		yellow	8 / 7 mm	+	250
1568261740	CLI C 2-4 GE/SW - CD		yellow	8 / 7 mm	-	250
1568261748	CLI C 2-4 GE/SW . CD		yellow	8 / 7 mm	.	250
1568261742	CLI C 2-4 GE/SW / CD		yellow	8 / 7 mm	/	250
1568261750	CLI C 2-4 GE/SW : CD		yellow	8 / 7 mm	:	250
1568261751	CLI C 2-4 GE/SW = CD		yellow	8 / 7 mm	=	250
1568261752	CLI C 2-4 GE/SW AC CD		yellow	8 / 7 mm	AC	250
1568261746	CLI C 2-4 GE/SW ET CD		yellow	8 / 7 mm	⏚	250
1568261747	CLI C 2-4 GE/SW PET. CD		yellow	8 / 7 mm	⏚	250
1568261697	CLI C 2-4 GE/SW Ä CD		yellow	8 / 7 mm	Ä	250
1568261699	CLI C 2-4 GE/SW Å CD		yellow	8 / 7 mm	Å	250
1568261735	CLI C 2-4 GE/SW Æ CD		yellow	8 / 7 mm	Æ	250
1568261695	CLI C 2-4 GE/SW Ö CD		yellow	8 / 7 mm	Ö	250
1568261736	CLI C 2-4 GE/SW Ø CD		yellow	8 / 7 mm	Ø	250
1568261741	CLI C 2-4 BL/WS - CD		blue	8 / 7 mm	-	250
1568261737	CLI C 2-4 RT/WS + CD		red	8 / 7 mm	+	250

CLI C 2-6 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871891728	CLI C 2-6 GE/SW L1 MP	yellow	8 / 7 mm	L1	100
1871891729	CLI C 2-6 GE/SW L2 MP	yellow	8 / 7 mm	L2	100
1871891730	CLI C 2-6 GE/SW L3 MP	yellow	8 / 7 mm	L3	100

CLI C 2-6 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871901728	CLI C 2-6 GE/SW L1 CD	yellow	8 / 7 mm	L1	125
1871901729	CLI C 2-6 GE/SW L2 CD	yellow	8 / 7 mm	L2	125
1871901730	CLI C 2-6 GE/SW L3 CD	yellow	8 / 7 mm	L3	125
1871901731	CLI C 2-6 GE/SW PE CD	yellow	8 / 7 mm	PE	125

CLI C 2-9 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1872031734	CLI C 2-9 GE/SW PEN MP	yellow	8 / 7 mm	PEN	100

CLI C 2-9 Special characters (CD)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	4 - 10 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1871971734	CLI C 2-9 GE/SW PEN CD	yellow	8 / 7 mm	PEN	125

CableLine® – CLI C – closed wire markers

CLI C 3-6 Numeric sequence (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	8 - 16 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0253411502	CLI C 3-6 GE/SW 0 MP	yellow	17 / 11 mm	0	20
0253411505	CLI C 3-6 GE/SW 1 MP	yellow	17 / 11 mm	1	20
0253411508	CLI C 3-6 GE/SW 2 MP	yellow	17 / 11 mm	2	20
0253411511	CLI C 3-6 GE/SW 3 MP	yellow	17 / 11 mm	3	20
0253411514	CLI C 3-6 GE/SW 4 MP	yellow	17 / 11 mm	4	20
0253411517	CLI C 3-6 GE/SW 5 MP	yellow	17 / 11 mm	5	20
0253411520	CLI C 3-6 GE/SW 6 MP	yellow	17 / 11 mm	6	20
0253411523	CLI C 3-6 GE/SW 7 MP	yellow	17 / 11 mm	7	20
0253411526	CLI C 3-6 GE/SW 8 MP	yellow	17 / 11 mm	8	20
0253411529	CLI C 3-6 GE/SW 9 MP	yellow	17 / 11 mm	9	20

CLI C 3-6 Alphabetic (MulitPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	8 - 16 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0253411637	CLI C 3-6 GE/SW A MP	yellow	17 / 11 mm	A	20
0253411639	CLI C 3-6 GE/SW B MP	yellow	17 / 11 mm	B	20
0253411641	CLI C 3-6 GE/SW C MP	yellow	17 / 11 mm	C	20
0253411643	CLI C 3-6 GE/SW D MP	yellow	17 / 11 mm	D	20
0253411645	CLI C 3-6 GE/SW E MP	yellow	17 / 11 mm	E	20
0253411647	CLI C 3-6 GE/SW F MP	yellow	17 / 11 mm	F	20
0253411649	CLI C 3-6 GE/SW G MP	yellow	17 / 11 mm	G	20
0253411651	CLI C 3-6 GE/SW H MP	yellow	17 / 11 mm	H	20
0253411653	CLI C 3-6 GE/SW I MP	yellow	17 / 11 mm	I	20
0253411655	CLI C 3-6 GE/SW J MP	yellow	17 / 11 mm	J	20
0253411657	CLI C 3-6 GE/SW K MP	yellow	17 / 11 mm	K	20
0253411659	CLI C 3-6 GE/SW L MP	yellow	17 / 11 mm	L	20
0253411661	CLI C 3-6 GE/SW M MP	yellow	17 / 11 mm	M	20
0253411663	CLI C 3-6 GE/SW N MP	yellow	17 / 11 mm	N	20
0253411665	CLI C 3-6 GE/SW O MP	yellow	17 / 11 mm	O	20
0253411667	CLI C 3-6 GE/SW P MP	yellow	17 / 11 mm	P	20
0253411669	CLI C 3-6 GE/SW Q MP	yellow	17 / 11 mm	Q	20
0253411671	CLI C 3-6 GE/SW R MP	yellow	17 / 11 mm	R	20
0253411673	CLI C 3-6 GE/SW S MP	yellow	17 / 11 mm	S	20
0253411676	CLI C 3-6 GE/SW T MP	yellow	17 / 11 mm	T	20
0253411679	CLI C 3-6 GE/SW U MP	yellow	17 / 11 mm	U	20
0253411681	CLI C 3-6 GE/SW V MP	yellow	17 / 11 mm	V	20
0253411683	CLI C 3-6 GE/SW W MP	yellow	17 / 11 mm	W	20
0253411687	CLI C 3-6 GE/SW X MP	yellow	17 / 11 mm	X	20
0253411696	CLI C 3-6 GE/SW Y MP	yellow	17 / 11 mm	Y	20
0253411698	CLI C 3-6 GE/SW Z MP	yellow	17 / 11 mm	Z	20

CLI C 3-6 Special characters (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	8 - 16 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0253411742	CLI C 3-6 GE/SW / MP	yellow	17 / 11 mm	/	20
0253411738	CLI C 3-6 GE/SW + MP	yellow	17 / 11 mm	+	20
0253411740	CLI C 3-6 GE/SW - MP	yellow	17 / 11 mm	-	20
0253411748	CLI C 3-6 GE/SW . MP	yellow	17 / 11 mm	.	20
0253411750	CLI C 3-6 GE/SW : MP	yellow	17 / 11 mm	:	20
0253411751	CLI C 3-6 GE/SW = MP	yellow	17 / 11 mm	=	20
0253411752	CLI C 3-6 GE/SW AC MP	yellow	17 / 11 mm	AC	20
0253411746	CLI C 3-6 GE/SW ET MP	yellow	17 / 11 mm	⏚	20
0253411697	CLI C 3-6 GE/SW Ä MP	yellow	17 / 11 mm	Ä	20
0253411699	CLI C 3-6 GE/SW Å MP	yellow	17 / 11 mm	Å	20
0253411695	CLI C 3-6 GE/SW Ö MP	yellow	17 / 11 mm	Ö	20
0253411741	CLI C 3-6 BL/WS - MP	blue	17 / 11 mm	-	20

CLI C 3-9 Special characters (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	8 - 16 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0253511726	CLI C 3-9 GE/SW A1 MP	yellow	17 / 11 mm	A1	20
0253511727	CLI C 3-9 GE/SW A2 MP	yellow	17 / 11 mm	A2	20
0253511728	CLI C 3-9 GE/SW L1 MP	yellow	17 / 11 mm	L1	20
0253511729	CLI C 3-9 GE/SW L2 MP	yellow	17 / 11 mm	L2	20
0253511730	CLI C 3-9 GE/SW L3 MP	yellow	17 / 11 mm	L3	20
0253511733	CLI C 3-9 GE/SW PE MP	yellow	17 / 11 mm	PE	20
1872661733	CLI C 3-9 GE/SW PEN MP	yellow	17 / 11 mm	PEN	20
0253511735	CLI C 3-9 GE/SW SL MP	yellow	17 / 11 mm	SL	20
0253511750	CLI C 3-9 GE/SW X1 MP	yellow	17 / 11 mm	X1	20
0253511751	CLI C 3-9 GE/SW X2 MP	yellow	17 / 11 mm	X2	20
0253511752	CLI C 3-9 GE/SW X3 MP	yellow	17 / 11 mm	X3	20

CableLine® – CLI C – closed wire markers

CLI R 02 Blank (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001687	CLI R 02-3 GE NE	yellow	4 / 3.4 mm	Blank	10

CLI R 1 Blank (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572900002	CLI R 1-3 BL NE	blue	5 / 4.2 mm	Blank	10
0572901687	CLI R 1-3 GE NE	yellow	5 / 4.2 mm	Blank	10

CLI R 02 Custom print (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560009999	CLI R 02-3 SDR	CSP	4 / 3.4 mm	Custom printing	10

CLI R 1 Custom print (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572909999	CLI R 1-3 SDR	CSP	5 / 4.2 mm	Custom printing	10

CLI R 02 International colour code (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001503	CLI R 02-3 SW/WS 0	black	4 / 3.4 mm	0	10
0560001506	CLI R 02-3 BR/WS 1	brown	4 / 3.4 mm	1	10
0560001509	CLI R 02-3 RT/WS 2	red	4 / 3.4 mm	2	10
0560001512	CLI R 02-3 OR/SW 3	orange	4 / 3.4 mm	3	10
0560001513	CLI R 02-3 GE/SW 4	yellow	4 / 3.4 mm	4	10
0560001518	CLI R 02-3 GN/WS 5	green	4 / 3.4 mm	5	10
0560001521	CLI R 02-3 BL/WS 6	blue	4 / 3.4 mm	6	10
0560001524	CLI R 02-3 VI/WS 7	violet	4 / 3.4 mm	7	10
0560001527	CLI R 02-3 GR/SW 8	grey	4 / 3.4 mm	8	10
0560001530	CLI R 02-3 WS/SW 9	white	4 / 3.4 mm	9	10

CLI R 02 Numeric sequence (MultiPack)



Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001501	CLI R 02-3 GE/SW 0	yellow	4 / 3.4 mm	0	10
0560001504	CLI R 02-3 GE/SW 1	yellow	4 / 3.4 mm	1	10
0560001507	CLI R 02-3 GE/SW 2	yellow	4 / 3.4 mm	2	10
0560001510	CLI R 02-3 GE/SW 3	yellow	4 / 3.4 mm	3	10
0560001513	CLI R 02-3 GE/SW 4	yellow	4 / 3.4 mm	4	10
0560001516	CLI R 02-3 GE/SW 5	yellow	4 / 3.4 mm	5	10
0560001519	CLI R 02-3 GE/SW 6	yellow	4 / 3.4 mm	6	10
0560001522	CLI R 02-3 GE/SW 7	yellow	4 / 3.4 mm	7	10
0560001525	CLI R 02-3 GE/SW 8	yellow	4 / 3.4 mm	8	10
0560001528	CLI R 02-3 GE/SW 9	yellow	4 / 3.4 mm	9	10

CLI R 02 Alphabetic (MulitPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001638	CLI R 02-3 GE/SW A	yellow	4 / 3.4 mm	A	10
0560001640	CLI R 02-3 GE/SW B	yellow	4 / 3.4 mm	B	10
0560001642	CLI R 02-3 GE/SW C	yellow	4 / 3.4 mm	C	10
0560001644	CLI R 02-3 GE/SW D	yellow	4 / 3.4 mm	D	10
0560001646	CLI R 02-3 GE/SW E	yellow	4 / 3.4 mm	E	10
0560001648	CLI R 02-3 GE/SW F	yellow	4 / 3.4 mm	F	10
0560001650	CLI R 02-3 GE/SW G	yellow	4 / 3.4 mm	G	10
0560001652	CLI R 02-3 GE/SW H	yellow	4 / 3.4 mm	H	10
0560001654	CLI R 02-3 GE/SW I	yellow	4 / 3.4 mm	I	10
0560001656	CLI R 02-3 GE/SW J	yellow	4 / 3.4 mm	J	10
0560001658	CLI R 02-3 GE/SW K	yellow	4 / 3.4 mm	K	10
0560001660	CLI R 02-3 GE/SW L	yellow	4 / 3.4 mm	L	10
0560001662	CLI R 02-3 GE/SW M	yellow	4 / 3.4 mm	M	10
0560001664	CLI R 02-3 GE/SW N	yellow	4 / 3.4 mm	N	10
0560001666	CLI R 02-3 GE/SW O	yellow	4 / 3.4 mm	O	10
0560001668	CLI R 02-3 GE/SW P	yellow	4 / 3.4 mm	P	10
0560001670	CLI R 02-3 GE/SW Q	yellow	4 / 3.4 mm	Q	10
0560001672	CLI R 02-3 GE/SW R	yellow	4 / 3.4 mm	R	10
0560001675	CLI R 02-3 GE/SW S	yellow	4 / 3.4 mm	S	10
0560001678	CLI R 02-3 GE/SW T	yellow	4 / 3.4 mm	T	10
0560001680	CLI R 02-3 GE/SW U	yellow	4 / 3.4 mm	U	10
0560001682	CLI R 02-3 GE/SW V	yellow	4 / 3.4 mm	V	10
0560001684	CLI R 02-3 GE/SW W	yellow	4 / 3.4 mm	W	10
0560001693	CLI R 02-3 GE/SW X	yellow	4 / 3.4 mm	X	10
0560001697	CLI R 02-3 GE/SW Y	yellow	4 / 3.4 mm	Y	10
0560001699	CLI R 02-3 GE/SW Z	yellow	4 / 3.4 mm	Z	10

CLI R 02 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack




Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001738	CLI R 02-3 GE/SW +	yellow	4 / 3.4 mm	+	10
0560001740	CLI R 02-3 GE/SW -	yellow	4 / 3.4 mm	-	10
0560001749	CLI R 02-3 GE/SW .	yellow	4 / 3.4 mm	.	10
0560001743	CLI R 02-3 GE/SW /	yellow	4 / 3.4 mm	/	10
0560001698	CLI R 02-3 GE/SW Å	yellow	4 / 3.4 mm	Å	10
0560001695	CLI R 02-3 GE/SW Ö	yellow	4 / 3.4 mm	Ö	10

CLI R 02-3 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	1.3 - 3 mm	MultiPack

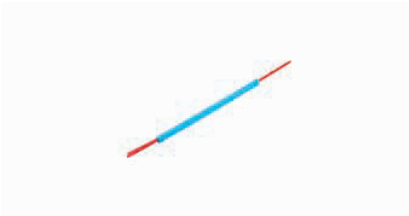

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0560001739	CLI R 02-3 RT/WS +	red	4 / 3.4 mm	+	10
0560001741	CLI R 02-3 BL/WS -	blue	4 / 3.4 mm	-	10

CLI R 1 International colour code (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572901502	CLI R 1-3 SW/WS 0	black	5 / 4.2 mm	0	10
0572901505	CLI R 1-3 BR/WS 1	brown	5 / 4.2 mm	1	10
0572901508	CLI R 1-3 RT/WS 2	red	5 / 4.2 mm	2	10
0572901511	CLI R 1-3 OR/SW 3	orange	5 / 4.2 mm	3	10
0572901515	CLI R 1-3 GE/SW 4	yellow	5 / 4.2 mm	4	10
0572901517	CLI R 1-3 GN/WS 5	green	5 / 4.2 mm	5	10
0572901520	CLI R 1-3 BL/WS 6	blue	5 / 4.2 mm	6	10
0572901523	CLI R 1-3 VI/WS 7	violet	5 / 4.2 mm	7	10
0572901526	CLI R 1-3 GR/SW 8	grey	5 / 4.2 mm	8	10
0572901529	CLI R 1-3 WS/SW 9	white	5 / 4.2 mm	9	10

CLI R 1-3 Numeric sequence (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572901503	CLI R 1-3 GE/SW 0	yellow	5 / 4.2 mm	0	10
0572901506	CLI R 1-3 GE/SW 1	yellow	5 / 4.2 mm	1	10
0572901509	CLI R 1-3 GE/SW 2	yellow	5 / 4.2 mm	2	10
0572901512	CLI R 1-3 GE/SW 3	yellow	5 / 4.2 mm	3	10
0572901515	CLI R 1-3 GE/SW 4	yellow	5 / 4.2 mm	4	10
0572901518	CLI R 1-3 GE/SW 5	yellow	5 / 4.2 mm	5	10
0572901521	CLI R 1-3 GE/SW 6	yellow	5 / 4.2 mm	6	10
0572901524	CLI R 1-3 GE/SW 7	yellow	5 / 4.2 mm	7	10
0572901527	CLI R 1-3 GE/SW 8	yellow	5 / 4.2 mm	8	10
0572901530	CLI R 1-3 GE/SW 9	yellow	5 / 4.2 mm	9	10

CLI R 1-3 Alphabetic (MulitPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572901638	CLI R 1-3 GE/SW A	yellow	5 / 4.2 mm	A	10
0572901640	CLI R 1-3 GE/SW B	yellow	5 / 4.2 mm	B	10
0572901642	CLI R 1-3 GE/SW C	yellow	5 / 4.2 mm	C	10
0572901644	CLI R 1-3 GE/SW D	yellow	5 / 4.2 mm	D	10
0572901646	CLI R 1-3 GE/SW E	yellow	5 / 4.2 mm	E	10
0572901648	CLI R 1-3 GE/SW F	yellow	5 / 4.2 mm	F	10
0572901650	CLI R 1-3 GE/SW G	yellow	5 / 4.2 mm	G	10
0572901652	CLI R 1-3 GE/SW H	yellow	5 / 4.2 mm	H	10
0572901654	CLI R 1-3 GE/SW I	yellow	5 / 4.2 mm	I	10
0572901656	CLI R 1-3 GE/SW J	yellow	5 / 4.2 mm	J	10
0572901658	CLI R 1-3 GE/SW K	yellow	5 / 4.2 mm	K	10
0572901660	CLI R 1-3 GE/SW L	yellow	5 / 4.2 mm	L	10
0572901662	CLI R 1-3 GE/SW M	yellow	5 / 4.2 mm	M	10
0572901664	CLI R 1-3 GE/SW N	yellow	5 / 4.2 mm	N	10
0572901666	CLI R 1-3 GE/SW O	yellow	5 / 4.2 mm	O	10
0572901668	CLI R 1-3 GE/SW P	yellow	5 / 4.2 mm	P	10
0572901670	CLI R 1-3 GE/SW Q	yellow	5 / 4.2 mm	Q	10
0572901672	CLI R 1-3 GE/SW R	yellow	5 / 4.2 mm	R	10
0572901675	CLI R 1-3 GE/SW S	yellow	5 / 4.2 mm	S	10
0572901678	CLI R 1-3 GE/SW T	yellow	5 / 4.2 mm	T	10
0572901680	CLI R 1-3 GE/SW U	yellow	5 / 4.2 mm	U	10
0572901682	CLI R 1-3 GE/SW V	yellow	5 / 4.2 mm	V	10
0572901684	CLI R 1-3 GE/SW W	yellow	5 / 4.2 mm	W	10
0572901693	CLI R 1-3 GE/SW X	yellow	5 / 4.2 mm	X	10
0572901697	CLI R 1-3 GE/SW Y	yellow	5 / 4.2 mm	Y	10
0572901699	CLI R 1-3 GE/SW Z	yellow	5 / 4.2 mm	Z	10

CLI R 1-3 Special characters (MultiPack)

Technical data

Material	Fire class acc. to UL 94	Temperature range	Wire O.D.	Version
PVC, soft, without Cadmium	V-0	-30 °C...80 °C	2.5 - 5 mm	MultiPack



Ordering data


Order No.	Type	Colour	Depth / Width	Printing	Qty.
0572901738	CLI R 1-3 GE/SW +	yellow	5 / 4.2 mm	+	10
0572901740	CLI R 1-3 GE/SW -	yellow	5 / 4.2 mm	-	10
0572901749	CLI R 1-3 GE/SW .	yellow	5 / 4.2 mm	.	10
0572901743	CLI R 1-3 GE/SW /	yellow	5 / 4.2 mm	/	10
0572901745	CLI R 1-3 GE/SW ET	yellow	5 / 4.2 mm	⏚	10
0572901698	CLI R 1-3 GE/SW Å	yellow	5 / 4.2 mm	Å	10
0572901741	CLI R 1-3 BL/WS -	blue	5 / 4.2 mm	-	10
0572901746	CLI R 1-3 BL/WS N	blue	5 / 4.2 mm	N	10
0572901739	CLI R 1-3 RT/WS +	red	5 / 4.2 mm	+	10

CLI O – Open wire markers


CLI O wire markers are fitted to connected wires, which makes them suitable for updating existing facilities.
Three different sizes are available to mark wire cross-sections from 0.4 mm² to maximum 4.0 mm². Profile and design guarantee the secure and permanent attachment of the individually combinable markers.

Advantages:

- Open markers for connected wires
- Marker profile with anti-rotation safeguard for combination marking
- Perfect for all marking tasks of retrofitted wiring
- Extremely low space requirements
- Rapid clip-on attachment saves time

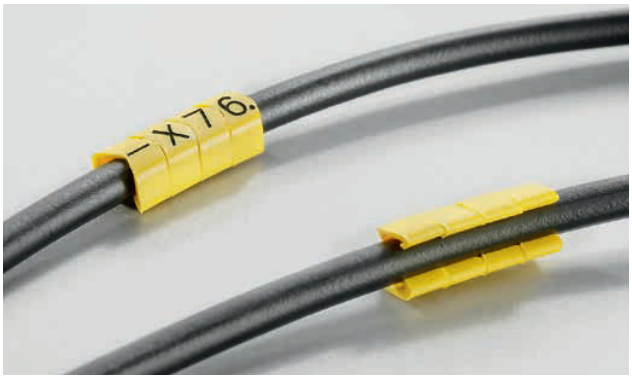

Open marker from type CLI O also allows mounting onto already connected wires.

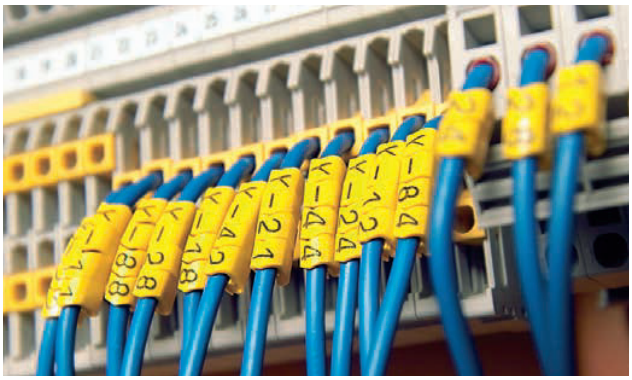

CLI O

Version	Open markers made from hard PVC. The flexible and sturdy barbed hooks guarantee secure attachment on the wire. Standard, special prints available.
Material	Hard PVC, cadmium- and silicone-free
Temperature range	–30 °C ... 80 °C
Flammability classification	Corresponds to V0 to UL 94
Resistance	Highly resistant to oils and petrol as well as gamma and UV radiation
Printing	Laser marking

Wire cross-section

CLI O 10	0.4 mm² – 1.5 mm²
CLI O 20	1.5 mm² – 3 mm²
CLI O 30	3 mm² – 4 mm²

CLI C 10 Blank (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	2 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0689600000	CLI O 10-3 GE NE MP	yellow	4 / 4 mm	Blank	200

CLI O 20 Blank (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	3 - 4 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0689700000	CLI O 20-3 GE NE MP	yellow	5 / 5.5 mm	Blank	200

CLI O 30 Blank (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	4 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0689800000	CLI O 30-3 GE NE MP	yellow	6 / 6 mm	Blank	200

CLI O 10 Custom Printing (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	2 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648009999	CLI O 10-3 SDR MP	CSP	4 / 4 mm	Custom printing	1000

CLI O 20 Custom Printing (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	3 - 4 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648109999	CLI O 20-3 SDR MP	CSP	5 / 5.5 mm	Custom printing	1000

CLI O 30 Custom Printing (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	4 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648209999	CLI O 30-3 SDR MP	CSP	6 / 6 mm	Custom printing	1000

CLI O 10 Alphabetic (MulitPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	2 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648001637	CLI O 10-3 GE/SW A MP	yellow	4 / 4 mm	A	200
0648001639	CLI O 10-3 GE/SW B MP	yellow	4 / 4 mm	B	200
0648001641	CLI O 10-3 GE/SW C MP	yellow	4 / 4 mm	C	200
0648001643	CLI O 10-3 GE/SW D MP	yellow	4 / 4 mm	D	200
0648001645	CLI O 10-3 GE/SW E MP	yellow	4 / 4 mm	E	200
0648001647	CLI O 10-3 GE/SW F MP	yellow	4 / 4 mm	F	200
0648001649	CLI O 10-3 GE/SW G MP	yellow	4 / 4 mm	G	200
0648001651	CLI O 10-3 GE/SW H MP	yellow	4 / 4 mm	H	200
0648001653	CLI O 10-3 GE/SW I MP	yellow	4 / 4 mm	I	200
0648001655	CLI O 10-3 GE/SW J MP	yellow	4 / 4 mm	J	200
0648001657	CLI O 10-3 GE/SW K MP	yellow	4 / 4 mm	K	200
0648001659	CLI O 10-3 GE/SW L MP	yellow	4 / 4 mm	L	200
0648001661	CLI O 10-3 GE/SW M MP	yellow	4 / 4 mm	M	200
0648001663	CLI O 10-3 GE/SW N MP	yellow	4 / 4 mm	N	200
0648001665	CLI O 10-3 GE/SW O MP	yellow	4 / 4 mm	O	200
0648001667	CLI O 10-3 GE/SW P MP	yellow	4 / 4 mm	P	200
0648001669	CLI O 10-3 GE/SW Q MP	yellow	4 / 4 mm	Q	200
0648001671	CLI O 10-3 GE/SW R MP	yellow	4 / 4 mm	R	200
0648001673	CLI O 10-3 GE/SW S MP	yellow	4 / 4 mm	S	200
0648001676	CLI O 10-3 GE/SW T MP	yellow	4 / 4 mm	T	200
0648001679	CLI O 10-3 GE/SW U MP	yellow	4 / 4 mm	U	200
0648001681	CLI O 10-3 GE/SW V MP	yellow	4 / 4 mm	V	200
0648001683	CLI O 10-3 GE/SW W MP	yellow	4 / 4 mm	W	200
0648001687	CLI O 10-3 GE/SW X MP	yellow	4 / 4 mm	X	200
0648001696	CLI O 10-3 GE/SW Y MP	yellow	4 / 4 mm	Y	200
0648001698	CLI O 10-3 GE/SW Z MP	yellow	4 / 4 mm	Z	200

CLI O 10 Special characters (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	2 - 3 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648001738	CLI O 10-3 GE/SW + MP	yellow	4 / 4 mm	+	200
0648001740	CLI O 10-3 GE/SW - MP	yellow	4 / 4 mm	-	200
0648001746	CLI O 10-3 GE/SW ET MP	yellow	4 / 4 mm	⏚	200
0648001697	CLI O 10-3 GE/SW Ä MP	yellow	4 / 4 mm	Ä	200
0648001699	CLI O 10-3 GE/SW Å MP	yellow	4 / 4 mm	Å	200
0648001695	CLI O 10-3 GE/SW Ö MP	yellow	4 / 4 mm	Ö	200

CLI O 20 Numeric sequence (MultiPack)



Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	3 - 4 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648101502	CLI O 20-3 GE/SW 0 MP	yellow	5 / 5.5 mm	0	200
0648101505	CLI O 20-3 GE/SW 1 MP	yellow	5 / 5.5 mm	1	200
0648101508	CLI O 20-3 GE/SW 2 MP	yellow	5 / 5.5 mm	2	200
0648101511	CLI O 20-3 GE/SW 3 MP	yellow	5 / 5.5 mm	3	200
0648101514	CLI O 20-3 GE/SW 4 MP	yellow	5 / 5.5 mm	4	200
0648101517	CLI O 20-3 GE/SW 5 MP	yellow	5 / 5.5 mm	5	200
0648101520	CLI O 20-3 GE/SW 6 MP	yellow	5 / 5.5 mm	6	200
0648101523	CLI O 20-3 GE/SW 7 MP	yellow	5 / 5.5 mm	7	200
0648101526	CLI O 20-3 GE/SW 8 MP	yellow	5 / 5.5 mm	8	200
0648101529	CLI O 20-3 GE/SW 9 MP	yellow	5 / 5.5 mm	9	200

CLI O 20 Alphabetic (MulitPack)



Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	3 - 4 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648101637	CLI O 20-3 GE/SW A MP	yellow	5 / 5.5 mm	A	200
0648101639	CLI O 20-3 GE/SW B MP	yellow	5 / 5.5 mm	B	200
0648101641	CLI O 20-3 GE/SW C MP	yellow	5 / 5.5 mm	C	200
0648101643	CLI O 20-3 GE/SW D MP	yellow	5 / 5.5 mm	D	200
0648101645	CLI O 20-3 GE/SW E MP	yellow	5 / 5.5 mm	E	200
0648101647	CLI O 20-3 GE/SW F MP	yellow	5 / 5.5 mm	F	200
0648101649	CLI O 20-3 GE/SW G MP	yellow	5 / 5.5 mm	G	200
0648101651	CLI O 20-3 GE/SW H MP	yellow	5 / 5.5 mm	H	200
0648101653	CLI O 20-3 GE/SW I MP	yellow	5 / 5.5 mm	I	200
0648101655	CLI O 20-3 GE/SW J MP	yellow	5 / 5.5 mm	J	200
0648101657	CLI O 20-3 GE/SW K MP	yellow	5 / 5.5 mm	K	200
0648101659	CLI O 20-3 GE/SW L MP	yellow	5 / 5.5 mm	L	200
0648101661	CLI O 20-3 GE/SW M MP	yellow	5 / 5.5 mm	M	200
0648101663	CLI O 20-3 GE/SW N MP	yellow	5 / 5.5 mm	N	200
0648101665	CLI O 20-3 GE/SW O MP	yellow	5 / 5.5 mm	O	200
0648101667	CLI O 20-3 GE/SW P MP	yellow	5 / 5.5 mm	P	200
0648101669	CLI O 20-3 GE/SW Q MP	yellow	5 / 5.5 mm	Q	200
0648101671	CLI O 20-3 GE/SW R MP	yellow	5 / 5.5 mm	R	200
0648101673	CLI O 20-3 GE/SW S MP	yellow	5 / 5.5 mm	S	200
0648101676	CLI O 20-3 GE/SW T MP	yellow	5 / 5.5 mm	T	200
0648101679	CLI O 20-3 GE/SW U MP	yellow	5 / 5.5 mm	U	200
0648101681	CLI O 20-3 GE/SW V MP	yellow	5 / 5.5 mm	V	200
0648101683	CLI O 20-3 GE/SW W MP	yellow	5 / 5.5 mm	W	200
0648101687	CLI O 20-3 GE/SW X MP	yellow	5 / 5.5 mm	X	200
0648101696	CLI O 20-3 GE/SW Y MP	yellow	5 / 5.5 mm	Y	200
0648101698	CLI O 20-3 GE/SW Z MP	yellow	5 / 5.5 mm	Z	200

CLI O 20 Special characters (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	3 - 4 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648101738	CLI O 20-3 GE/SW + MP	yellow	5 / 5.5 mm	+	200
0648101740	CLI O 20-3 GE/SW - MP	yellow	5 / 5.5 mm	-	200
0648101697	CLI O 20-3 GE/SW Ä MP	yellow	5 / 5.5 mm	Ä	200
0648101699	CLI O 20-3 GE/SW Å MP	yellow	5 / 5.5 mm	Å	200
0648101695	CLI O 20-3 GE/SW Ö MP	yellow	5 / 5.5 mm	Ö	200

CLI O 30 Numeric sequence (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	4 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648201502	CLI O 30-3 GE/SW 0 MP	yellow	6 / 6 mm	0	200
0648201505	CLI O 30-3 GE/SW 1 MP	yellow	6 / 6 mm	1	200
0648201508	CLI O 30-3 GE/SW 2 MP	yellow	6 / 6 mm	2	200
0648201511	CLI O 30-3 GE/SW 3 MP	yellow	6 / 6 mm	3	200
0648201514	CLI O 30-3 GE/SW 4 MP	yellow	6 / 6 mm	4	200
0648201517	CLI O 30-3 GE/SW 5 MP	yellow	6 / 6 mm	5	200
0648201520	CLI O 30-3 GE/SW 6 MP	yellow	6 / 6 mm	6	200
0648201523	CLI O 30-3 GE/SW 7 MP	yellow	6 / 6 mm	7	200
0648201526	CLI O 30-3 GE/SW 8 MP	yellow	6 / 6 mm	8	200
0648201529	CLI O 30-3 GE/SW 9 MP	yellow	6 / 6 mm	9	200

CLI O 30 Alphabetic (MulitPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	4 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648201637	CLI O 30-3 GE/SW A MP	yellow	6 / 6 mm	A	200
0648201639	CLI O 30-3 GE/SW B MP	yellow	6 / 6 mm	B	200
0648201641	CLI O 30-3 GE/SW C MP	yellow	6 / 6 mm	C	200
0648201643	CLI O 30-3 GE/SW D MP	yellow	6 / 6 mm	D	200
0648201645	CLI O 30-3 GE/SW E MP	yellow	6 / 6 mm	E	200
0648201647	CLI O 30-3 GE/SW F MP	yellow	6 / 6 mm	F	200
0648201649	CLI O 30-3 GE/SW G MP	yellow	6 / 6 mm	G	200
0648201651	CLI O 30-3 GE/SW H MP	yellow	6 / 6 mm	H	200
0648201653	CLI O 30-3 GE/SW I MP	yellow	6 / 6 mm	I	200
0648201655	CLI O 30-3 GE/SW J MP	yellow	6 / 6 mm	J	200
0648201657	CLI O 30-3 GE/SW K MP	yellow	6 / 6 mm	K	200
0648201659	CLI O 30-3 GE/SW L MP	yellow	6 / 6 mm	L	200
0648201661	CLI O 30-3 GE/SW M MP	yellow	6 / 6 mm	M	200
0648201663	CLI O 30-3 GE/SW N MP	yellow	6 / 6 mm	N	200
0648201665	CLI O 30-3 GE/SW O MP	yellow	6 / 6 mm	O	200
0648201667	CLI O 30-3 GE/SW P MP	yellow	6 / 6 mm	P	200
0648201669	CLI O 30-3 GE/SW Q MP	yellow	6 / 6 mm	Q	200
0648201671	CLI O 30-3 GE/SW R MP	yellow	6 / 6 mm	R	200
0648201673	CLI O 30-3 GE/SW S MP	yellow	6 / 6 mm	S	200
0648201676	CLI O 30-3 GE/SW T MP	yellow	6 / 6 mm	T	200
0648201679	CLI O 30-3 GE/SW U MP	yellow	6 / 6 mm	U	200
0648201681	CLI O 30-3 GE/SW V MP	yellow	6 / 6 mm	V	200
0648201683	CLI O 30-3 GE/SW W MP	yellow	6 / 6 mm	W	200
0648201687	CLI O 30-3 GE/SW X MP	yellow	6 / 6 mm	X	200
0648201696	CLI O 30-3 GE/SW Y MP	yellow	6 / 6 mm	Y	200
0648201698	CLI O 30-3 GE/SW Z MP	yellow	6 / 6 mm	Z	200

CLI O 30 Special characters (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	4 - 5 mm	MultiPack



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
0648201738	CLI O 30-3 GE/SW + MP	yellow	6 / 6 mm	+	200
0648201740	CLI O 30-3 GE/SW - MP	yellow	6 / 6 mm	-	200
0648201746	CLI O 30-3 GE/SW ET MP	yellow	6 / 6 mm	⏚	200
0648201697	CLI O 30-3 GE/SW Ä MP	yellow	6 / 6 mm	Ä	200
0648201699	CLI O 30-3 GE/SW Å MP	yellow	6 / 6 mm	Å	200
0648201695	CLI O 30-3 GE/SW Ö MP	yellow	6 / 6 mm	Ö	200

CabelLine® CLI M – Cable markers and holders


CLI M identification markers simply slide onto CLI MH carrier strips and are secured by means of cable ties. CLI MH strips are available in two lengths. This system is particularly suitable for wires and cables with large cross-sections.

Advantages:

- Combination markers for marking cables and conduits
- One size for all diameters from 16 mm²
- Unrestricted combination options
- Closed, captive marking
- Very good legibility



Markers from type CLI M are pushed onto holding strips of type CLI MH and finally mounted with cable ties.

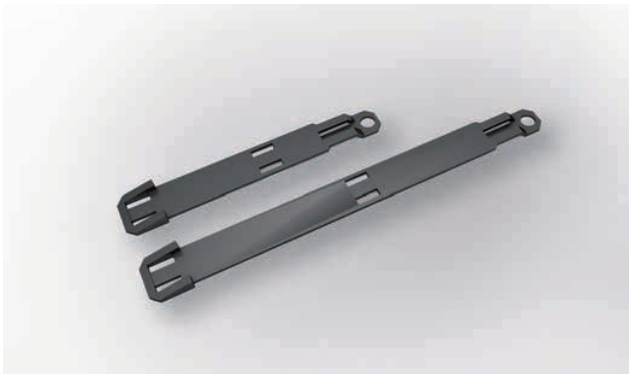

CLI MH

Version	CLI MH carrier strips for CLI M markers are available in lengths of 70 and 110 mm for 10 or 20 CLI M markers respectively. They are attached using one or two cable ties.
Material	PA 6.6
Temperature range	–30 °C ... 80 °C
Flammability classification	Corresponds to V2 to UL 94
Resistance	Highly resistant to oils and petrol as well as gamma and UV radiation
Printing	Maximum 6.2 mm

CLI M

Version	Closed, oval combination markers. The markers are slid onto CLI MH holders and secured by means of cable ties. Standard, special and international colour-code compliant prints available.
Material	Soft PVC, cadmium- and silicone-free
Temperature range	–30 °C ... 80 °C
Flammability classification	Corresponds to V0 to UL 94
Resistance	Highly resistant to oils and petrol as well as gamma and UV radiation
Printing	Laser marking

Wire cross-section

CLI M 2	16 mm² – 500 mm²

CLI M 2 Blank (on loop)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	Loop



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1886531687	CLI M 2-25Ω GE NE SG		yellow	3 / 11.4 mm	Blank	1000
1886541687	CLI M 2-40Ω GE NE SG		yellow	3 / 11.4 mm	Blank	500

CLI M 2 Blank (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568300001	CLI M 2-4 GE NE CD		yellow	3 / 11.4 mm	Blank	500

CLI M 2 Blank (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1733650004	CLI M 2-4 GE NE MP		yellow	3 / 11.4 mm	Blank	100

CLI M Custom Printing (on loop)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	Loop



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1912830000	CLI M 2-4 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912840000	CLI M 2-6 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1873440000	CLI M 2-9 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1873450000	CLI M 2-12 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1899260000	CLI M 2-15 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1899230000	CLI M 2-18 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1873460000	CLI M 2-21 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912860000	CLI M 2-24 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1579500000	CLI M 2-25Ω SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912870000	CLI M 2-27 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912880000	CLI M 2-30 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912920000	CLI M 2-33 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912950000	CLI M 2-36 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1912960000	CLI M 2-39 SDR SG		yellow	3 / 11.4 mm	Custom printing	100
1634790000	CLI M 2-40Ω SDR SG		yellow	3 / 11.4 mm	Custom printing	100

CLI M Custom Printing (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568309999	CLI M 2-4 SDR CD		yellow	3 / 11.4 mm	Custom printing	500
1871789999	CLI M 2-6 SDR CD		yellow	3 / 11.4 mm	Custom printing	250
1899250000	CLI M 2-9 SDR CD		yellow	3 / 11.4 mm	Custom printing	200

CLI M 2-4 International color code (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1733651503	CLI M 2-4 SW/WS 0 MP		black	3 / 11.3 mm	0	100
1733651506	CLI M 2-4 BR/WS 1 MP		brown	3 / 11.3 mm	1	100
1733651509	CLI M 2-4 RT/WS 2 MP		red	3 / 11.3 mm	2	100
1733651512	CLI M 2-4 OR/SW 3 MP		orange	3 / 11.3 mm	3	100
1733651514	CLI M 2-4 GE/SW 4 MP		yellow	3 / 11.3 mm	4	100
1733651518	CLI M 2-4 GN/WS 5 MP		green	3 / 11.3 mm	5	100
1733651521	CLI M 2-4 BL/WS 6 MP		blue	3 / 11.3 mm	6	100
1733651524	CLI M 2-4 VI/WS 7 MP		violet	3 / 11.3 mm	7	100
1733651527	CLI M 2-4 GR/SW 8 MP		grey	3 / 11.3 mm	8	100
1733651530	CLI M 2-4 WS/SW 9 MP		white	3 / 11.3 mm	9	100

CLI M 2-4 Special characters (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1733651742	CLI M 2-4 GE/SW / MP		yellow	3 / 11.3 mm	/	100
1733651738	CLI M 2-4 GE/SW + MP		yellow	3 / 11.3 mm	+	100
1733651740	CLI M 2-4 GE/SW - MP		yellow	3 / 11.3 mm	-	100
1733651748	CLI M 2-4 GE/SW . MP		yellow	3 / 11.3 mm	.	100
1733651750	CLI M 2-4 GE/SW : MP		yellow	3 / 11.3 mm	:	100
1733651751	CLI M 2-4 GE/SW = MP		yellow	3 / 11.3 mm	=	100
1733651752	CLI M 2-4 GE/SW AC MP		yellow	3 / 11.3 mm	AC	100
1733651746	CLI M 2-4 GE/SW ET MP		yellow	3 / 11.3 mm	⏚	100
1733651747	CLI M 2-4 GE/SW PET. MP		yellow	3 / 11.3 mm	⏚	100
1733651697	CLI M 2-4 GE/SW Ä MP		yellow	3 / 11.3 mm	Ä	100
1733651699	CLI M 2-4 GE/SW Å MP		yellow	3 / 11.3 mm	Å	100
1733651695	CLI M 2-4 GE/SW Ö MP		yellow	3 / 11.3 mm	Ö	100

CLI M 2-4 Numeric sequence (MultiPack)



Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1733651514	CLI M 2-4 GE/SW 4 MP	yellow	3 / 11.3 mm	4	100
1733651502	CLI M 2-4 GE/SW 0 MP	yellow	3 / 11.3 mm	0	100
1733651505	CLI M 2-4 GE/SW 1 MP	yellow	3 / 11.3 mm	1	100
1733651508	CLI M 2-4 GE/SW 2 MP	yellow	3 / 11.3 mm	2	100
1733651511	CLI M 2-4 GE/SW 3 MP	yellow	3 / 11.3 mm	3	100
1733651517	CLI M 2-4 GE/SW 5 MP	yellow	3 / 11.3 mm	5	100
1733651520	CLI M 2-4 GE/SW 6 MP	yellow	3 / 11.3 mm	6	100
1733651523	CLI M 2-4 GE/SW 7 MP	yellow	3 / 11.3 mm	7	100
1733651526	CLI M 2-4 GE/SW 8 MP	yellow	3 / 11.3 mm	8	100
1733651529	CLI M 2-4 GE/SW 9 MP	yellow	3 / 11.3 mm	9	100

CLI M 2-4 Alphabetic (MulitPack)



Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack

Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1733651637	CLI M 2-4 GE/SW A MP	yellow	3 / 11.3 mm	A	100
1733651639	CLI M 2-4 GE/SW B MP	yellow	3 / 11.3 mm	B	100
1733651641	CLI M 2-4 GE/SW C MP	yellow	3 / 11.3 mm	C	100
1733651643	CLI M 2-4 GE/SW D MP	yellow	3 / 11.3 mm	D	100
1733651645	CLI M 2-4 GE/SW E MP	yellow	3 / 11.3 mm	E	100
1733651647	CLI M 2-4 GE/SW F MP	yellow	3 / 11.3 mm	F	100
1733651649	CLI M 2-4 GE/SW G MP	yellow	3 / 11.3 mm	G	100
1733651651	CLI M 2-4 GE/SW H MP	yellow	3 / 11.3 mm	H	100
1733651653	CLI M 2-4 GE/SW I MP	yellow	3 / 11.3 mm	I	100
1733651655	CLI M 2-4 GE/SW J MP	yellow	3 / 11.3 mm	J	100
1733651657	CLI M 2-4 GE/SW K MP	yellow	3 / 11.3 mm	K	100
1733651659	CLI M 2-4 GE/SW L MP	yellow	3 / 11.3 mm	L	100
1733651661	CLI M 2-4 GE/SW M MP	yellow	3 / 11.3 mm	M	100
1733651663	CLI M 2-4 GE/SW N MP	yellow	3 / 11.3 mm	N	100
1733651665	CLI M 2-4 GE/SW O MP	yellow	3 / 11.3 mm	O	100
1733651667	CLI M 2-4 GE/SW P MP	yellow	3 / 11.3 mm	P	100
1733651669	CLI M 2-4 GE/SW Q MP	yellow	3 / 11.3 mm	Q	100
1733651671	CLI M 2-4 GE/SW R MP	yellow	3 / 11.3 mm	R	100
1733651673	CLI M 2-4 GE/SW S MP	yellow	3 / 11.3 mm	S	100
1733651676	CLI M 2-4 GE/SW T MP	yellow	3 / 11.3 mm	T	100
1733651679	CLI M 2-4 GE/SW U MP	yellow	3 / 11.3 mm	U	100
1733651681	CLI M 2-4 GE/SW V MP	yellow	3 / 11.3 mm	V	100
1733651683	CLI M 2-4 GE/SW W MP	yellow	3 / 11.3 mm	W	100
1733651687	CLI M 2-4 GE/SW X MP	yellow	3 / 11.3 mm	X	100
1733651696	CLI M 2-4 GE/SW Y MP	yellow	3 / 11.3 mm	Y	100
1733651698	CLI M 2-4 GE/SW Z MP	yellow	3 / 11.3 mm	Z	100

CLI M 2-4 International colour code (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568301503	CLI M 2-4 SW/WS 0 CD	black	3 / 11.3 mm	0	500
1568301506	CLI M 2-4 BR/WS 1 CD	brown	3 / 11.3 mm	1	500
1568301509	CLI M 2-4 RT/WS 2 CD	red	3 / 11.3 mm	2	500
1568301512	CLI M 2-4 OR/SW 3 CD	orange	3 / 11.3 mm	3	500
1568301514	CLI M 2-4 GE/SW 4 CD	yellow	3 / 11.3 mm	4	500
1568301518	CLI M 2-4 GN/WS 5 CD	green	3 / 11.3 mm	5	500
1568301521	CLI M 2-4 BL/WS 6 CD	blue	3 / 11.3 mm	6	500
1568301524	CLI M 2-4 VI/WS 7 CD	violet	3 / 11.3 mm	7	500
1568301527	CLI M 2-4 GR/SW 8 CD	grey	3 / 11.3 mm	8	500
1568301530	CLI M 2-4 WS/SW 9 CD	white	3 / 11.3 mm	9	500

CLOI M 2-4 Special characters (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type	Colour	Depth / Width	Printing	Qty.
1568301742	CLI M 2-4 GE/SW / CD	yellow	3 / 11.3 mm	/	500
1568301738	CLI M 2-4 GE/SW + CD	yellow	3 / 11.3 mm	+	500
1568301740	CLI M 2-4 GE/SW - CD	yellow	3 / 11.3 mm	-	500
1568301748	CLI M 2-4 GE/SW . CD	yellow	3 / 11.3 mm	.	500
1568301750	CLI M 2-4 GE/SW : CD	yellow	3 / 11.3 mm	:	500
1568301751	CLI M 2-4 GE/SW = CD	yellow	3 / 11.3 mm	=	500
1568301752	CLI M 2-4 GE/SW AC CD	yellow	3 / 11.3 mm	AC	500
1568301746	CLI M 2-4 GE/SW ET CD	yellow	3 / 11.3 mm	⏚	500
1568301747	CLI M 2-4 GE/SW PET. CD	yellow	3 / 11.3 mm	⏚	500
1568301694	CLI M 2-4 GE/SW Ä CD	yellow	3 / 11.3 mm	Ä	500
1568301699	CLI M 2-4 GE/SW Å CD	yellow	3 / 11.3 mm	Å	500
1568301735	CLI M 2-4 GE/SW Æ CD	yellow	3 / 11.3 mm	Æ	500
1568301695	CLI M 2-4 GE/SW Ö CD	yellow	3 / 11.3 mm	Ö	500
1568301736	CLI M 2-4 GE/SW Ø CD	yellow	3 / 11.3 mm	Ø	500
1568301741	CLI M 2-4 BL/WS - CD	blue	3 / 11.3 mm	-	500

CLI M 2-4 Numeric sequence (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568301000	CLI M 2-4 WS/SW 0 CD	❍	white	3 / 11.3 mm	0	500
1568301502	CLI M 2-4 GE/SW 0 CD	●	yellow	3 / 11.3 mm	0	500
1568301697	CLI M 2-4 WS/SW 1 CD	❍	white	3 / 11.3 mm	1	500
1568301505	CLI M 2-4 GE/SW 1 CD	●	yellow	3 / 11.3 mm	1	500
1568301514	CLI M 2-4 GE/SW 4 CD	●	yellow	3 / 11.3 mm	4	500
1568300002	CLI M 2-4 WS/SW 2 CD	❍	white	3 / 11.3 mm	2	500
1568301508	CLI M 2-4 GE/SW 2 CD	●	yellow	3 / 11.3 mm	2	500
1568300003	CLI M 2-4 WS/SW 3 CD	❍	white	3 / 11.3 mm	3	500
1568301511	CLI M 2-4 GE/SW 3 CD	●	yellow	3 / 11.3 mm	3	500
1568300004	CLI M 2-4 WS/SW 4 CD	❍	white	3 / 11.3 mm	4	500
1568301530	CLI M 2-4 WS/SW 9 CD	❍	white	3 / 11.3 mm	9	500
1568300005	CLI M 2-4 WS/SW 5 CD	❍	white	3 / 11.3 mm	5	500
1568301517	CLI M 2-4 GE/SW 5 CD	●	yellow	3 / 11.3 mm	5	500
1568300006	CLI M 2-4 WS/SW 6 CD	❍	white	3 / 11.3 mm	6	500
1568301520	CLI M 2-4 GE/SW 6 CD	●	yellow	3 / 11.3 mm	6	500
1568300007	CLI M 2-4 WS/SW 7 CD	❍	white	3 / 11.3 mm	7	500
1568301523	CLI M 2-4 GE/SW 7 CD	●	yellow	3 / 11.3 mm	7	500
1568300008	CLI M 2-4 WS/SW 8 CD	❍	white	3 / 11.3 mm	8	500
1568301526	CLI M 2-4 GE/SW 8 CD	●	yellow	3 / 11.3 mm	8	500
1568301529	CLI M 2-4 GE/SW 9 CD	●	yellow	3 / 11.3 mm	9	500

CLI M 2-4 Alphabetic (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1568301637	CLI M 2-4 GE/SW A CD	●	yellow	3 / 11.3 mm	A	500
1568301639	CLI M 2-4 GE/SW B CD	●	yellow	3 / 11.3 mm	B	500
1568301641	CLI M 2-4 GE/SW C CD	●	yellow	3 / 11.3 mm	C	500
1568301643	CLI M 2-4 GE/SW D CD	●	yellow	3 / 11.3 mm	D	500
1568301645	CLI M 2-4 GE/SW E CD	●	yellow	3 / 11.3 mm	E	500
1568301647	CLI M 2-4 GE/SW F CD	●	yellow	3 / 11.3 mm	F	500
1568301649	CLI M 2-4 GE/SW G CD	●	yellow	3 / 11.3 mm	G	500
1568301651	CLI M 2-4 GE/SW H CD	●	yellow	3 / 11.3 mm	H	500
1568301653	CLI M 2-4 GE/SW I CD	●	yellow	3 / 11.3 mm	I	500
1568301655	CLI M 2-4 GE/SW J CD	●	yellow	3 / 11.3 mm	J	500
1568301657	CLI M 2-4 GE/SW K CD	●	yellow	3 / 11.3 mm	K	500
1568301659	CLI M 2-4 GE/SW L CD	●	yellow	3 / 11.3 mm	L	500
1568301661	CLI M 2-4 GE/SW M CD	●	yellow	3 / 11.3 mm	M	500
1568301663	CLI M 2-4 GE/SW N CD	●	yellow	3 / 11.3 mm	N	500
1568301665	CLI M 2-4 GE/SW O CD	●	yellow	3 / 11.3 mm	O	500
1568301667	CLI M 2-4 GE/SW P CD	●	yellow	3 / 11.3 mm	P	500
1568301669	CLI M 2-4 GE/SW Q CD	●	yellow	3 / 11.3 mm	Q	500
1568301671	CLI M 2-4 GE/SW R CD	●	yellow	3 / 11.3 mm	R	500
1568301673	CLI M 2-4 GE/SW S CD	●	yellow	3 / 11.3 mm	S	500
1568301676	CLI M 2-4 GE/SW T CD	●	yellow	3 / 11.3 mm	T	500
1568301679	CLI M 2-4 GE/SW U CD	●	yellow	3 / 11.3 mm	U	500
1568301681	CLI M 2-4 GE/SW V CD	●	yellow	3 / 11.3 mm	V	500
1568301683	CLI M 2-4 GE/SW W CD	●	yellow	3 / 11.3 mm	W	500
1568301687	CLI M 2-4 GE/SW X CD	●	yellow	3 / 11.3 mm	X	500
1568301696	CLI M 2-4 GE/SW Y CD	●	yellow	3 / 11.3 mm	Y	500
1568301698	CLI M 2-4 GE/SW Z CD	●	yellow	3 / 11.3 mm	Z	500

CLI M 2-6 Special characters (CD)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	CD



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1871781728	CLI M 2-6 GE/SW L1 CD		yellow	3 / 11.3 mm	L1	250
1871781729	CLI M 2-6 GE/SW L2 CD		yellow	3 / 11.3 mm	L2	250
1871781730	CLI M 2-6 GE/SW L3 CD		yellow	3 / 11.3 mm	L3	250

CLI M 2-6 Special characters (MultiPack)

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Version
PVC, soft, without Cadmium	-30 °C...80 °C	V-0	10 - 317 mm	MultiPack



Ordering data

Order No.	Type		Colour	Depth / Width	Printing	Qty.
1871751728	CLI M 2-6 GE/SW L1 MP		yellow	3 / 11.3 mm	L1	100
1871751729	CLI M 2-6 GE/SW L2 MP		yellow	3 / 11.3 mm	L2	100
1871751730	CLI M 2-6 GE/SW L3 MP		yellow	3 / 11.3 mm	L3	100

CLI RH

Holder for fitting CLI R 02 (red) or CLI R 1 (blue) mounting mandrels



Technical data


Material
Polyamide

Ordering data

Order No.	Type		Colour	Depth / Width	Qty.
0563700000	CLI RH 20-02 CLI R 02	●	red	28 / 55 mm	1
0563600000	CLI RH 20-10 CLI R 10	●	blue	28 / 55 mm	1

CLI R

The CLI R mounting mandrels are ideal for applying CLI C markers to conductors.
- CLI R 02 for CLI C 02-3
- CLI R 1 for CLI C 1-3



Technical data

Material
POM

Ordering data

Order No.	Type		Colour	Depth / Width	Qty.
0559900000	CLI R 02 F. CLI C 02-3	●	red	1.5 / 2 mm	20
0532100000	CLI R 1 F. CLI C 1-3	●	blue	2 / 2.5 mm	20

CLI RS

The CLI RS metal mounting mandrels are ideal for applying CLI RS markers to conductors.
- CLI RS 3 for CLI C 02
- CLI RS 4 for CLI C 02 and CLI C 1 (max. Ø 4.2mm)
- CLI RS 5 for CLI C 1 (max. Ø 5mm)



Technical data

Material
Steel

Ordering data

Order No.	Type		Colour	Depth / Width	Qty.
0559200000	CLI RS 3 MDCLI C 02	●	silver	3 / 3 mm	1
0559300000	CLI RS 4 MDCLI C1+02	●	silver	4 / 4 mm	1
0648300000	CLI RS 5 MDCLI C 1	●	silver	5 / 5 mm	1

Holders for CLI M markers

The CLI MH holder strip for CLI M markers is available in lengths of 70 and 100 mm for 10, respectively 20 CLI M 2-4. Held in place with one or two cable ties.



Technical data


Material
Polyamide 66

Ordering data

Order No.	Type		Colour	Depth / Width	Qty.
0189400000	CLI MH 110 HSTR	●	black	3 / 11.3 mm	100
0524400000	CLI MH 70 HSTR	●	black	3 / 11.3 mm	100

WSK

Assortment box with 12 compartments for placing CLI markers.
WSK 12 (0336000000) is filled with CLI C 1-3 GE printed from von 0 to 9.



Technical data

Material
Polystyrene

Ordering data

Order No.	Type	Colour	Depth / Width	Qty.
0335900000	WSK 12 , LEER	Transparent	185 mm	1
0336000000	WSK 12 M. CLI C 1-3 GE/SW BEZ.0-9/+/- ●	orange	185 mm	1

CLI CD box

Steel cassette for holding CLI-CDs
- 25 CLI-CDs with CLI C 02-3
- 21 CLI-CDs with CLI C 1-3
- 14 CLI-CDs with CLI C 2-4
- 11 CLI-CDs with CLI M 2-4



Technical data

Material
Sheet steel


Ordering data

Order No.	Type	Colour	Depth / Width	Qty.
1763290000	CLI CD-BOX ❍	white	160 mm	1

WSM – Stainless steel markers

WSM is a complete marking system for cables, wires, conduits and components. It offers markings that last in conditions that no other markers can withstand. The range consists of stainless steel character tiles, holders and cable ties – available separately or complete in the WSM Set and Service Box.



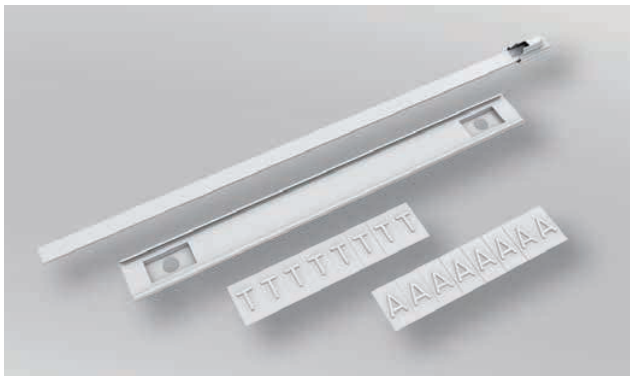

Advantages:

- Durable, embossed characters for optimum legibility
- Resistant to heat, cold, corrosion, acids, chemicals, fire and more
- Individual and multi-character markings can also be combined
- Rapid attachment
- Ideal for outdoor applications
- Easy attachment with cable ties

Contents of WSM Service Box:
Character tiles
40 each of
0-9, A-Ö, +, -, x, /, :, ., ~, =, ü, ⏚, neutral.

Cable ties
200 cable ties 200 mm

Stainless steel holders
30 pieces each of 48 mm and 60 mm,
20 pieces of 84 mm
10 pieces of 108 mm and 288 mm

WSM

Version	Marker holders designed with raised profiles at both ends to ensure the cable ties slide through easily. Individual or combined, the single marker plates are inserted into the holder. Special printing available.
Material	Acid-resistant stainless steel grade SS 2348 (AISI-316)
Temperature range	–80 °C ... 500 °C
Resistance	Fireproof. Resistant to heat, cold, corrosion, acids, chemical substances, and so forth.
Printing	High-quality embossed. Alphanumeric and special characters
Fixing accessories	Stainless steel cable ties with ball-bearing lock

WSM small plates



Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Width
Stainless steel 1.4404	500 °C			9.9 mm

Ordering data

Order No.	Type		Colour	Depth	Printing	Qty.
1712501000	WSM 10 0		silver	0.3 mm	0	200
1712500001	WSM 10 1		silver	0.3 mm	1	200
1712500002	WSM 10 2		silver	0.3 mm	2	200
1712500003	WSM 10 3		silver	0.3 mm	3	200
1712500004	WSM 10 4		silver	0.3 mm	4	200
1712500005	WSM 10 5		silver	0.3 mm	5	200
1712500006	WSM 10 6		silver	0.3 mm	6	200
1712500007	WSM 10 7		silver	0.3 mm	7	200
1712500008	WSM 10 8		silver	0.3 mm	8	200
1712500009	WSM 10 9		silver	0.3 mm	9	200
1712501637	WSM 10 A		silver	0.3 mm	A	200
1712501639	WSM 10 B		silver	0.3 mm	B	200
1712501641	WSM 10 C		silver	0.3 mm	C	200
1712501643	WSM 10 D		silver	0.3 mm	D	200
1712501645	WSM 10 E		silver	0.3 mm	E	200
1712501647	WSM 10 F		silver	0.3 mm	F	200
1712501649	WSM 10 G		silver	0.3 mm	G	200
1712501651	WSM 10 H		silver	0.3 mm	H	200
1712501653	WSM 10 I		silver	0.3 mm	I	200
1712501655	WSM 10 J		silver	0.3 mm	J	200
1712501657	WSM 10 K		silver	0.3 mm	K	200
1712501659	WSM 10 L		silver	0.3 mm	L	200
1712501661	WSM 10 M		silver	0.3 mm	M	200
1712501663	WSM 10 N		silver	0.3 mm	N	200
1712501665	WSM 10 O		silver	0.3 mm	O	200
1712501667	WSM 10 P		silver	0.3 mm	P	200
1712501669	WSM 10 Q		silver	0.3 mm	Q	200
1712501671	WSM 10 R		silver	0.3 mm	R	200
1712501673	WSM 10 S		silver	0.3 mm	S	200
1712501676	WSM 10 T		silver	0.3 mm	T	200
1712501679	WSM 10 U		silver	0.3 mm	U	200
1712501681	WSM 10 V		silver	0.3 mm	V	200
1712501683	WSM 10 W		silver	0.3 mm	W	200
1712501687	WSM 10 X		silver	0.3 mm	X	200
1712501696	WSM 10 Y		silver	0.3 mm	Y	200
1712501698	WSM 10 Z		silver	0.3 mm	Z	200
1712501054	WSM 10 Ä		silver	0.3 mm	Ä	200
1712501700	WSM 10 Å		silver	1 mm	Å	200
1712501672	WSM 10 Æ		silver	1 mm	Æ	200
1712501055	WSM 10 Ö		silver	0.3 mm	Ö	200
1712501670	WSM 10 Ø		silver	1 mm	Ø	200
1712501699	WSM 10 Ü		silver	1 mm	Ü	200
1712501056	WSM 10 ~		silver	0.3 mm	~	200
1712501744	WSM 10 (		silver	0.3 mm	(	200
1712501738	WSM 10 +		silver	0.3 mm	+	200
1712501740	WSM 10 -		silver	0.3 mm	-	200
1712501743	WSM 10 .		silver	0.3 mm	.	200
1712501739	WSM 10 /		silver	0.3 mm	/	200
1712501741	WSM 10 :		silver	0.3 mm	:	200
1712501742	WSM 10 =		silver	0.3 mm	=	200
1712501053	WSM 10 ERDE		silver	0.3 mm	⏚	200
1924930000	WSM SERVICE BOX KOMP.		silver	109 mm	see text	1

WSM – stainless steel markers

WSM holder

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Width
Stainless steel 1.4404	250 °C			11



Ordering data

Order No.	Type		Colour	Depth	Number of characters	Qty.
1774500000	WSMH 48MM		silver	0.3 mm	6	50
1774510000	WSMH 60MM		silver	0.3 mm	8	50
1774520000	WSMH 84MM		silver	0.3 mm	12	50
1774530000	WSMH 108MM		silver	0.3 mm	16	50
1002680000	WSMH 176MM		silver	0.3 mm	28	50
1774490000	WSMH 288MM		silver	0.3 mm	46	50

WSM holder custom printing

Technical data

Material	Temperature range	Fire class acc. to UL 94	Wire O.D.	Width
Stainless steel 1.4404	500 °C			10

Ordering data

Order No.	Type		Colour	Depth	Number of characters	Qty.
1912170000	WSMC 1-5		silver	0.5 mm	5	1
1891680000	WSMC 6-10		silver	0.5 mm	10	1
1891670000	WSMC 11-15		silver	0.5 mm	15	1
1912140000	WSMC 16-20		silver	0.5 mm	20	1
1912150000	WSMC 21-25		silver	0.5 mm	25	1
1912160000	WSMC 26-30		silver	0.5 mm	30	1

Labels – standard print

Symbol Pack

Technical data

Material	Adhesive	Fire class acc. to UL 94	Temperature range	Colour
Acrylic-coated fibre webbing	Permanent acrylic copolymer		-45 °C...80 °C	yellow




Ordering data

Order No.	Type	Number	Width / Height	Printing	Qty.
1741090000	SYMBOL-P. 25X25X25 B/DR	12	25 / 25 mm		120
1741100000	SYMBOL-P. 50X50X50 B/DR	4	50 / 50 mm		40
1741110000	SYMBOL-P. 75X75X75 B/DR	2	75 / 75 mm		20

Service Pack

Technical data

Material	Adhesive	Fire class acc. to UL 94	Temperature range	Colour
Acrylic-coated fibre webbing	Permanent acrylic copolymer		-45 °C...80 °C	black



Ordering data

Order No.	Type	Number	Width / Height	Printing	Qty.
1707350001	SERV-P. DIAM16 L1 SW/WS	20	16 / 16 mm	L1	200
1707350002	SERV-P. DIAM16 L2 SW/WS	20	16 / 16 mm	L2	200
1707350003	SERV-P. DIAM16 L3 SW/WS	20	16 / 16 mm	L3	200
1707350004	SERV-P. DIAM16 N BL/WS	20	16 / 16 mm	N	200
1707350006	SERV-P. DIAM16 PE GE/GN	20	16 / 16 mm	PE	200
1707350005	SERV-P.DIAM16ERDE GE/GN	20	16 / 16 mm	⏚	200

Marko Cards

Technical data

Material	Adhesive	Fire class acc. to UL 94	Temperature range	Colour
Acrylic-coated fibre webbing	Permanent acrylic copolymer		-29 °C...80 °C	yellow




Ordering data

Order No.	Type	Number	Width / Height	Printing	Qty.
1700530001	MARKO-C. 25X25X25 B/DR.		25 / 25 mm		140
1700540001	MARKO-C. 50X50X50 B/DR.		50 / 50 mm		70
1700550001	MARKO-C.100X100X100 B/DR		100 / 100 mm		30
1700560001	MARKO-C.200X200X200 B/DR		200 / 200 mm		10

PageTab

Technical data

Material	Adhesive	Fire class acc. to UL 94	Temperature range	Colour
Acrylic-coated fibre webbing	Permanent acrylic copolymer		-29 °C...93 °C	yellow



Ordering data

Order No.	Type	Number	Width / Height	Printing	Qty.
1686160000	PAGETAB 15/9	310	15 / 9 mm	Neutral	7750
1686170000	PAGETAB 19/11	200	19 / 11 mm	Neutral	5000
1686180000	PAGETAB 20/8	280	20 / 8 mm	Neutral	7000
1686190000	PAGETAB 28/11	125	28 / 11 mm	Neutral	3125
1686200000	PAGETAB 38/11	100	38 / 11 mm	Neutral	2500
1686210000	PAGETAB 56/22	24	56 / 22 mm	Neutral	600
1686220000	PAGETAB 60/35	16	60 / 35 mm	Neutral	400

TABPACK FLAG bag

Technical data

Material	Temperature range	Fire class acc. to UL 94	Adhesive
Cotton fabric	-29 °C...80 °C	V-0	Natural rubber adhesive

Ordering data

Order No.	Type		Colour	Height	Width	Qty.
1107340000	TABPACK FLAG 54/8 WS	❍	white	8 mm	54 mm	120



TABPACK

Technical data

Material	Temperature range	Fire class acc. to UL 94	Adhesive
Acrylic-coated fibre webbing	-29 °C...80 °C		Permanent acrylic copolymer

Ordering data

Order No.	Type		Colour	Height	Width	Qty.
1686110000	TABPACK 14X9	●	yellow	9 mm	14 mm	840
1686120000	TABPACK 15X6	●	yellow	6 mm	15 mm	1000
1686130000	TABPACK 19X11 M. RAND	●	yellow	11 mm	19 mm	440
1686140000	TABPACK 21X8	●	yellow	8 mm	21 mm	620

