
# EMT 20 LG

Membrane spout, TPE, RAL 7035, M20






Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS


| | |
|---|---|
| **Material** | Thermoplastic elastomer |
| **Temp. range min** | -40 °C |
| **Temp. range max** | 80 °C |
| **Glow wire test** | 750 °C |
| **Protection class** | IP66 |
| **Ø Connection thread D** | 20 |
| **Length screw-in thread L** | 9,5 mm |
| **Ø cable diameter min** | 1 mm |
| **Ø cable diameter max** | 15 mm |
| **External diameter ED** | 25 mm |
| **Total length TL** | 11 mm |
| **Ø Drilling** | 20 mm - 21,2 mm |
| **Wall thickness S** | 2 mm |
| **Product Color** | RAL 7035 |
| **Order no. RAL 7035** | 10062560 |
| **Type** | EMT 20 LG |
| **Packing unit** | 100 |
| **EAN number** | 4007685625609 |
| **Tariff number** | 39269097 |
| **ETIM-Classification** | EC000451 |

27.10.2026

Your Contact:
**WISKA Hoppmann GmbH**
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com



Other technical data on request / subject to change without notice

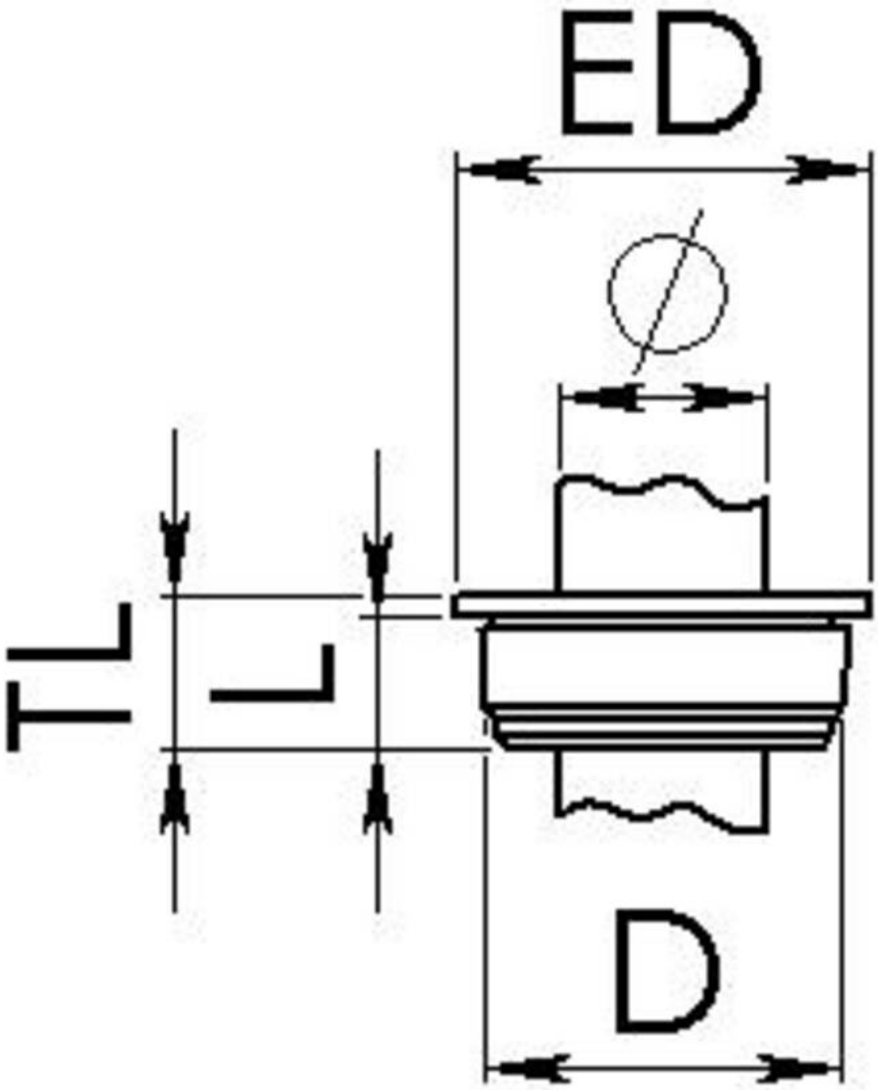


Your Contact:
**WISKA Hoppmann GmbH**
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com



Other technical data on request / subject to change without notice