
EVS 32 LG

Stop end, polystyrene, RAL 7035, M32





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Polystyrene, impact resistant
Temp. range min	-20 °C
Temp. range max	60 °C
Protection class	IP56
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	32
Lead	1,5
Length screw-in thread L	8 mm
Total length TL	12 mm
External diameter ED	37 mm
Product Color	RAL 7035
Order no. RAL 7035	10062494
Type	EVS 32 LG
Packing unit	100
EAN number	4007685624947
Tariff number	39269097
ETIM-Classification	EC000032


Recommended accessories

EMUG 32 LG	10060774
EADR 32	10062805

27.10.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

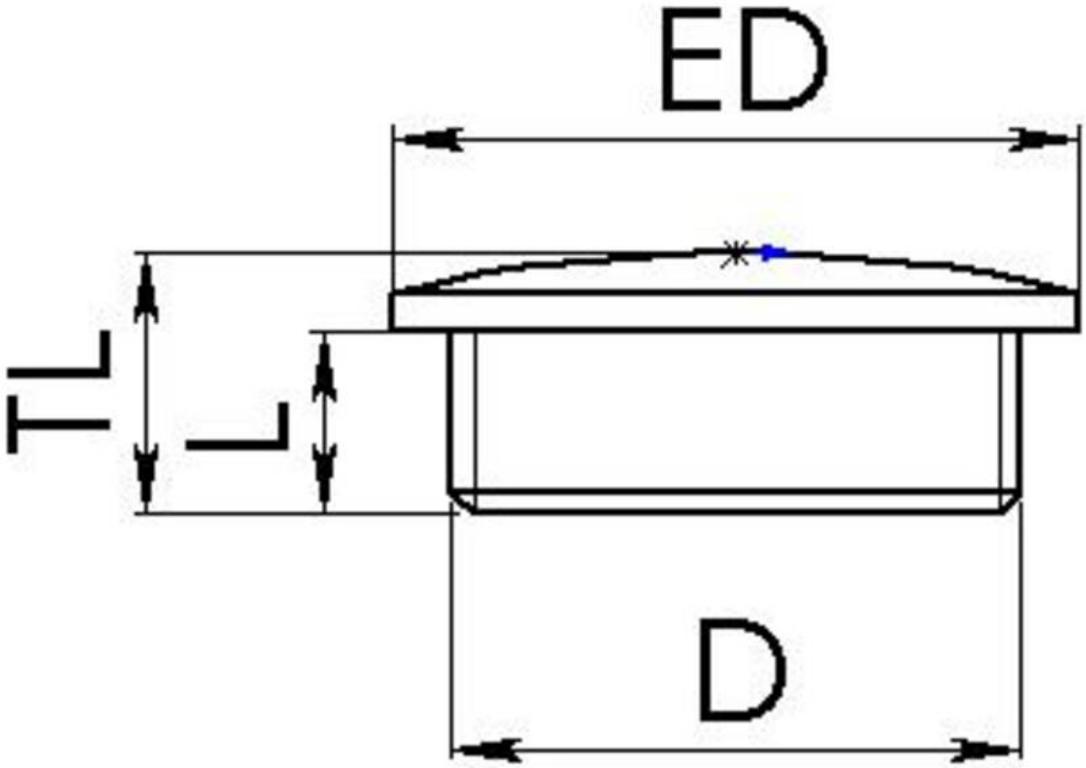

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice